

270 JUNIPER AVENUE RESIDENTIAL PROJECT

AIR QUALITY/GREENHOUSE GAS STUDY

Prepared for:

Rincon Homes

5315 Avenida Encinas, Suite 200
Carlsbad, CA 92008

Prepared by:



June 2024

270 JUNIPER AVENUE RESIDENTIAL PROJECT CARLSBAD, CALIFORNIA

AIR QUALITY and GREENHOUSE GAS STUDY

Table of Contents

	Page
PROJECT DESCRIPTION	1
SETTING	4
Air Pollution Regulation	4
California Air Resources Board	5
San Diego Air Pollution Control District	6
Air Quality Management Plans	6
SDAPCD Rules and Regulations	8
Regional Climate and Local Air Quality	9
Pollutants	10
Sensitive Receptors	13
Monitored Air Quality	13
AIR QUALITY IMPACT ANALYSIS	14
Methodology and Significance Thresholds	14
Construction Emissions	18
Operational Impacts	20
GREENHOUSE GAS EMISSION ASSESSMENT	24
REFERENCES	30
List of Figures	
Figure 1 Vicinity Map	3
Figure 2 Site Plan	4
List of Tables	
Table 1 Current Federal and State Ambient Air Quality Standards	5
Table 2 San Diego County Attainment Status	11
Table 3 Ambient Air Quality Data	14
Table 4 SDAPCD Air Emission Significance Thresholds	16
Table 5 Estimated Maximum Daily Construction Emissions With Dust Control Measures	19
Table 6 Estimated Operational Emissions	21
Table 7 Estimated Construction Greenhouse Gas Emissions	25
Table 8 Estimated Annual Energy-Related Greenhouse Gas Emissions	27

Table 9 Estimated Annual Solid Waste and Water Use Greenhouse Gas Emissions. 27
Table 10 Estimated Annual Mobile Emissions of Greenhouse Gases 27
Table 11 Combined Annual Greenhouse Gas Emissions..... 28

Appendices

Appendix A CalEEMod Air Quality and Greenhouse Gas Emissions Model Results -
Summer/Annual Emissions

270 JUNIPER AVENUE RESIDENTIAL PROJECT CARLSBAD, CALIFORNIA

AIR QUALITY and GREENHOUSE GAS STUDY

This report is an analysis of the potential air quality and greenhouse gas impacts associated with the 270 Juniper Avenue Residential Project, a multifamily development proposed for construction in the City of Carlsbad. The report has been prepared by Birdseye Planning Group, LLC, under contract to the applicant to support the environmental review process and address comments provided by the City of Carlsbad after review of the initial project entitlement submittal. This study analyzes the potential for temporary impacts associated with construction activity and long-term impacts associated with operation of the proposed project.

PROJECT DESCRIPTION

The 270 Juniper Avenue Residential Project is proposed for a site located at 270 Juniper Avenue in the City of Carlsbad, California (APN 204-240-22). The site is on the north side of Juniper Avenue mid-block between Garfield Street to the west and Washington Street to the east and would replace an existing single-family residence with 21 new three-story multifamily townhome units. Of the total, one unit would be reserved as an affordable unit for lease to an income-qualifying tenant. A total of 42 garage and five visitor parking spaces would be provided. The project would provide 11 EV spaces; however, each unit would be wired for installation of an EV charging system. The site is zoned Residential 3 (R-3), Multifamily Residential. The site is surrounded by existing single- and multi-family residences. The project would be permitted outright in the R-3 zone. Construction would begin in summer 2025 and be completed in early 2026. The following scope of work is intended to demonstrate that the project meets the conditions for a Class 32 categorical exemption for air quality. While not required for a Class 32 exemption, for informational purposes, this report also analyzes the Project's contribution to GHG emissions. The site is shown in Figure 1. The proposed site plan is shown in Figure 2.

The following measures are intended to demonstrate compliance with statewide regulations; and thus, have been incorporated into the the air emissions modeling

- The project will provide recycling bins in the trash enclosure areas;
- The project will install drought-tolerant vegetation and water-efficient irrigation systems;
- The project will install low-water use appliances and fixtures;
- The project will install Energy Star, or equivalent, dishwashers, clothes washers, refrigerators, and fans;
- The project will be compliant with San Diego Air Pollution Control District (SDAPCD) Rule 67.0.1 (d) which requires the use of low Volatile Organic Compound (VOC) paint

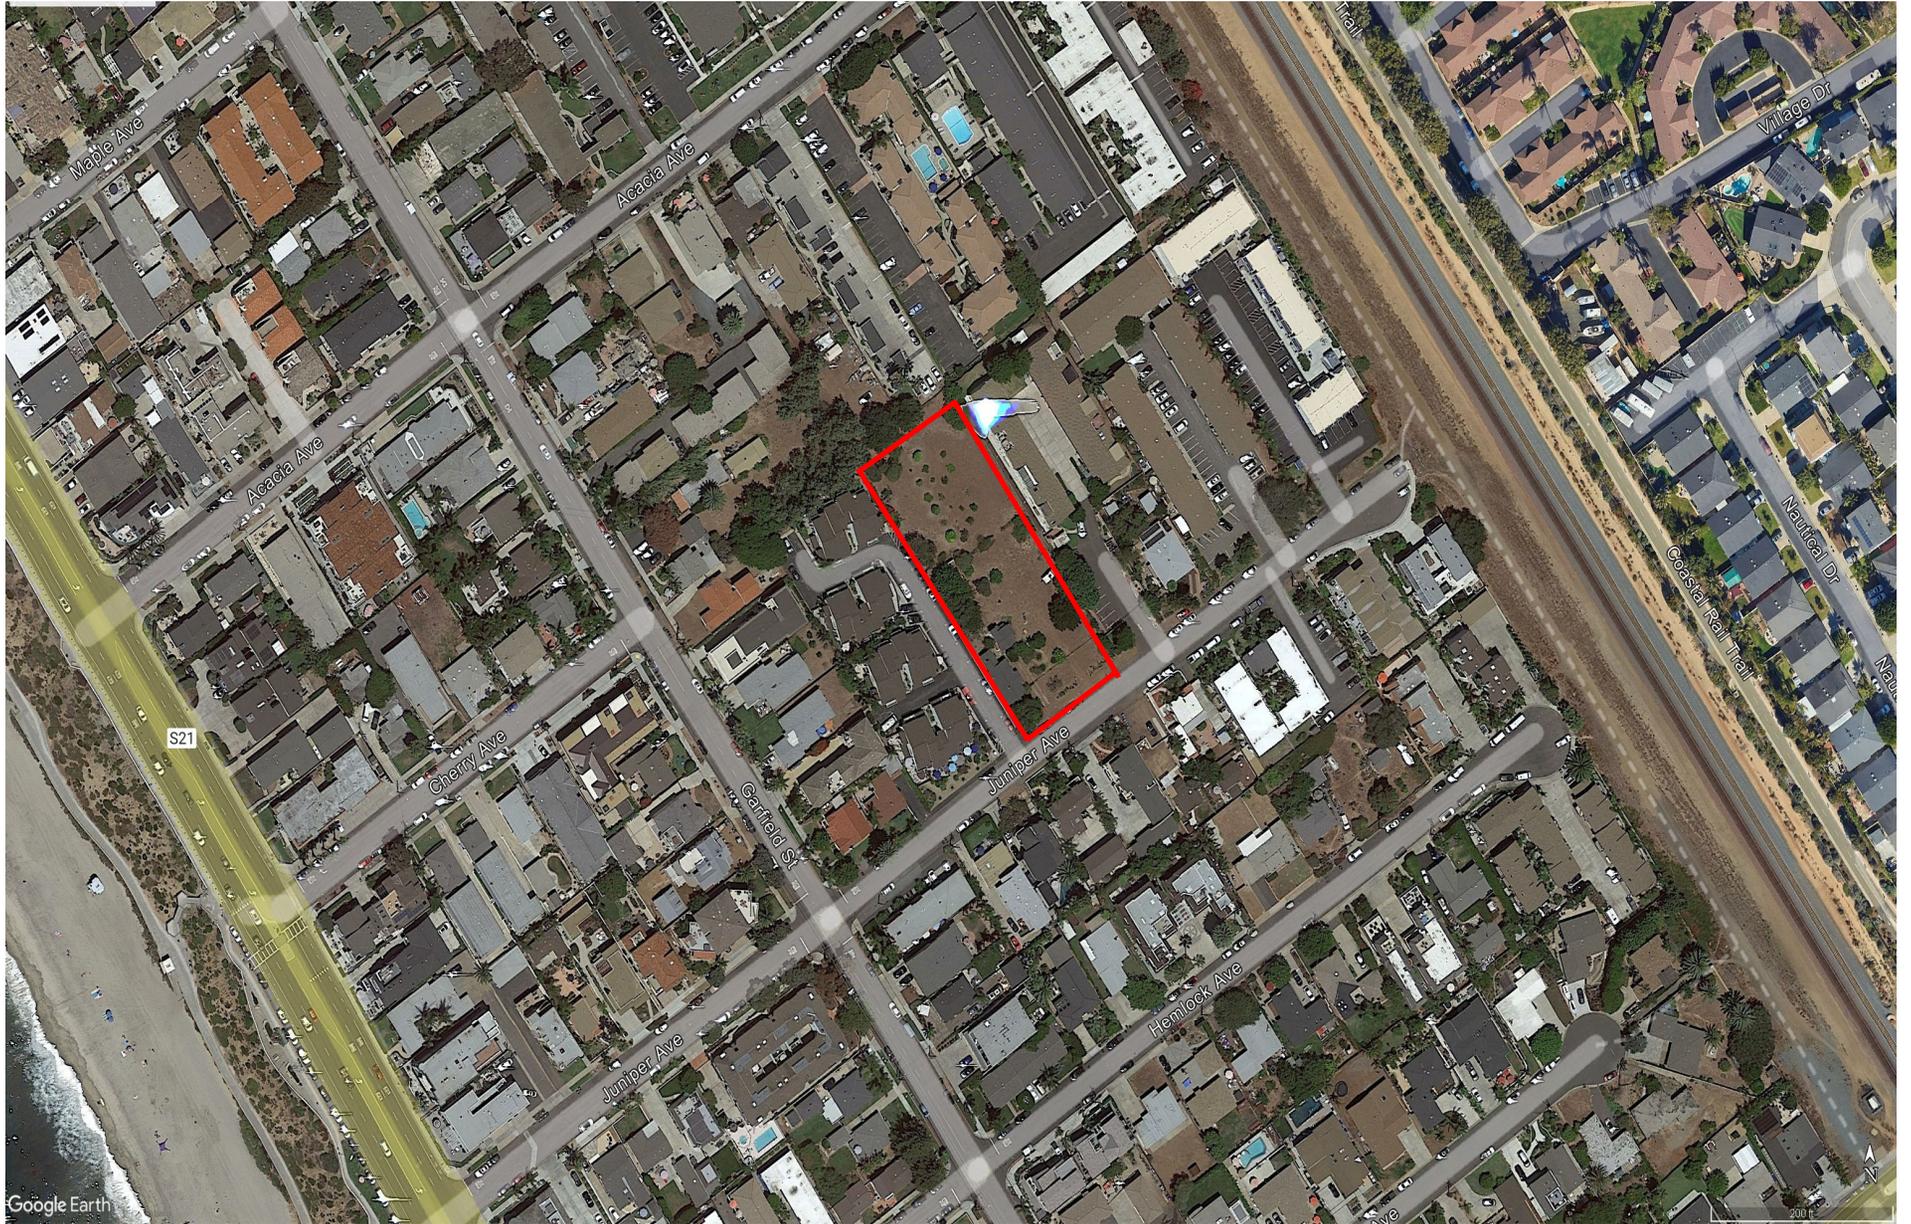



Figure 1—Vicinity Map

 - Project Site

CT 2023-0005
 PLD 2023-0007
 CDP 2023-0058



ALL IDEAS, DESIGN AND DIRECTION INDICATED WITHIN THESE DRAWINGS ARE THE PROPERTY OF K&M MILLER ARCHITECTS, INC. AND ARE INTENDED TO BE ASSOCIATED WITH THIS SPECIFIC PROJECT. ONLY THE ORIGINAL ARCHITECTURAL AND ENGINEERING DRAWINGS OR ACCOMPANYING SPECIFICATIONS WITHIN THE CONTROL OF THE ARCHITECT.

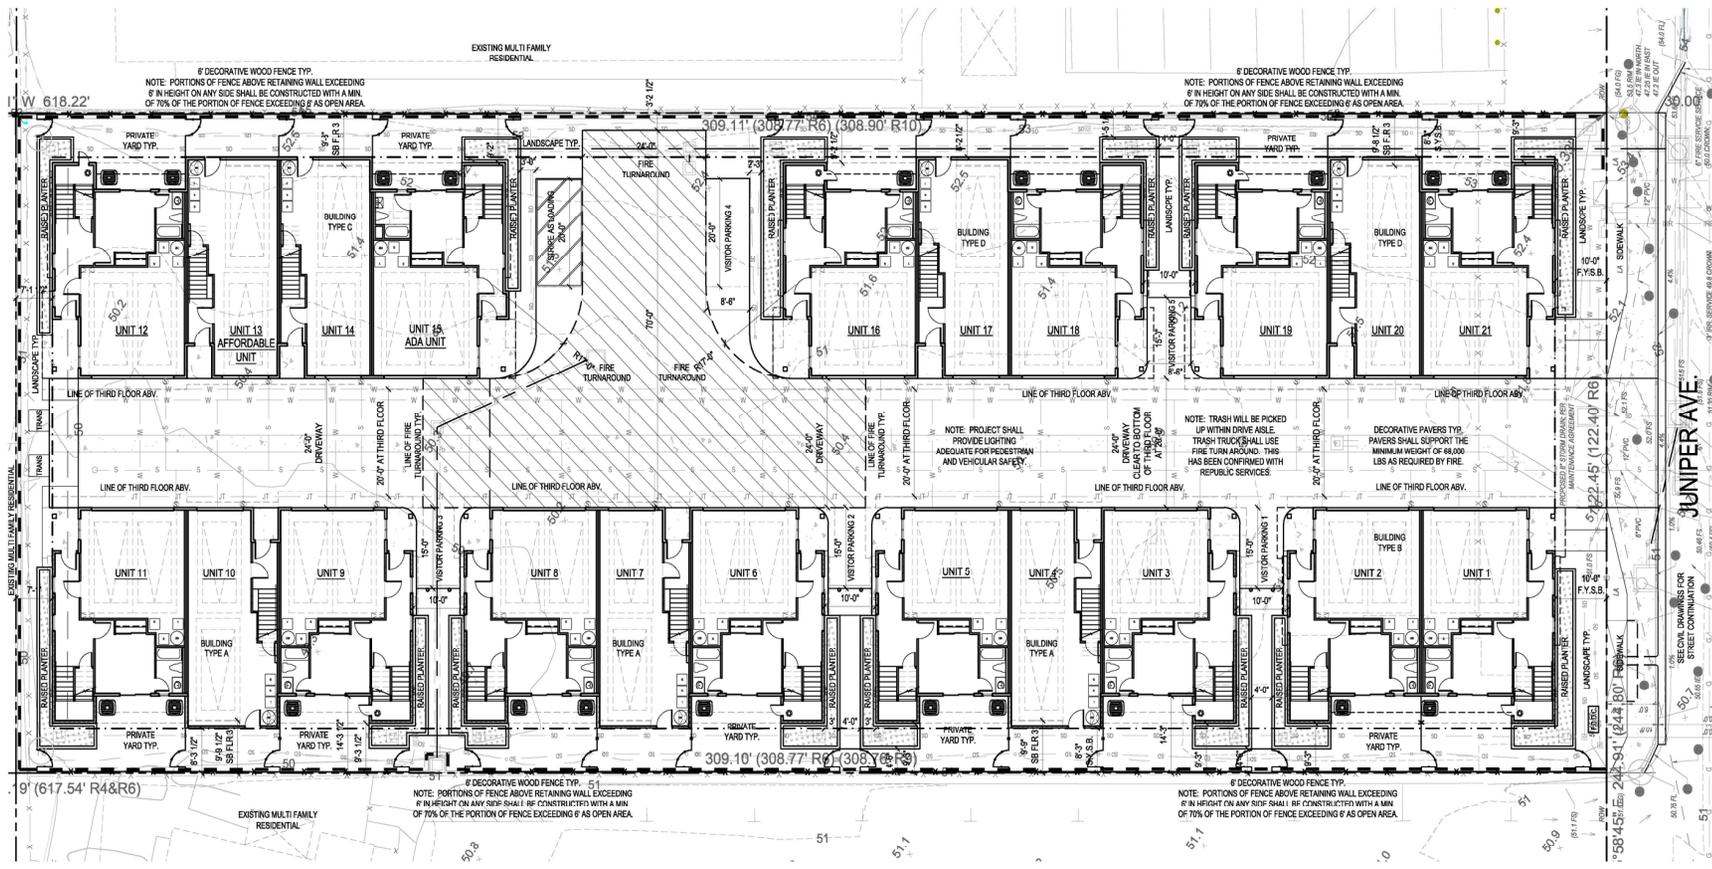

JUNIPER COAST HOMES
 270 JUNIPER AVE.
 CARLSBAD, CA

Date: 11-24-23
 Project: JUNIPER COAST HOMES
 File: A11
 Revisions:
 PLANNING #1: 2-23-24
 PLANNING #2: 5-11-24

Sheet Title:
SITE PLAN

Sheet Number:
A1.1

SITE PLAN



Figure 2— Site Plan

- (no greater than 50 grams/Liter) for use on building interior and exterior surface and 100 grams/Liter for traffic marking coatings; and
- The project will install bicycle parking facilities.

Dust Control Methods

The project would implement various construction dust control strategies as design features to be compliant with SDAPCD Rule 55. Compliance with these dust control measures are listed as follows and would be identified on grading plan approvals:

- During clearing, grading, earth-moving, excavation, or transportation of cut or fill materials, water trucks or sprinkler systems shall be used to prevent dust from leaving the site and to create a crust after each day's activities cease;
- During construction, water trucks or sprinkler systems shall be used to keep all areas of vehicle movement damp enough to prevent dust from leaving the site. At a minimum, this would include wetting down such areas later in the morning, after work is completed for the day, and whenever winds exceed 15 mph during active operations. Watering of active disturbance areas, including active grading areas and unpaved roads, would occur approximately every 2 hours of active operations, approximately three times per work day (at a minimum):
- All grading and excavation operations shall be halted when wind speeds exceed 25 miles per hour;
- Dirt and debris spilled onto paved surfaces at the project site and on the adjacent roadways shall be swept, vacuumed, and/or washed at the end of each workday; and
- All trucks hauling dirt, sand, soil, or other loose material to and from the construction site shall be covered and/or a minimum 2 feet of freeboard shall be maintained.

REGULATORY SETTING

Air Pollution Regulation

Air pollutants are regulated at the national, State, and air basin level; each agency has a different degree of control. The United States Environmental Protection Agency (USEPA) regulates at the national level; the California Air Resources Control Board (CARB) regulates at the State level; and the SDAPCD regulates air quality in San Diego County.

The federal and state governments have been empowered by the federal and state Clean Air Acts to regulate the emission of airborne pollutants and have established ambient air quality standards for the protection of public health. The USEPA is the federal agency designated to administer national air quality regulations, while CARB is the state equivalent in the California

Environmental Protection Agency. Local control over air quality management is provided by CARB through multi-county and county-level Air Pollution Control Districts (APCDs) (also referred to as Air Quality Management Districts). CARB establishes statewide air quality standards and is responsible for the control of mobile emission sources, while the local APCDs are responsible for enforcing standards and regulating stationary sources. CARB has established 15 air basins statewide. The City of Carlsbad is located in the San Diego Air Basin (SDAB), which is under the jurisdiction of the SDAPCD.

California Air Resources Board

CARB, which became part of the California EPA (CalEPA) in 1991, is responsible for ensuring implementation of the California Clean Air Act (CCAA), meeting state requirements of the federal Clean Air Act and establishing California Ambient Air Quality Standards (CAAQs). It is also responsible for setting emission standards for vehicles sold in California and for other emission sources such as consumer products and certain off-road equipment. CARB also established passenger vehicle fuel specifications and oversees the functions of local air pollution control districts and air quality management districts, which in turn administer air quality activities at the regional and county level. The CCAA is administered by CARB at the state level and by the Air Quality Management Districts at the regional level. Both state and federal standards are summarized in Table 1. The federal "primary" standards have been established to protect the public health. The federal "secondary" standards are intended to protect the nation's welfare and account for air pollutant effects on soil, water, visibility, materials, vegetation, and other aspects of the general welfare.

Table 1
Ambient Air Quality Standards

Pollutant	Average Time	California Standards	National Standards
Ozone (O ₃)	1 hour	0.09 ppm	--
	8 hours	0.070 ppm	0.070 ppm
Carbon Monoxide (CO)	8 hours	9.0 ppm	9 ppm
	1 hour	20 ppm	35 ppm
Nitrogen Dioxide (NO ₂)	Annual Average	0.030 ppm	0.053 ppm
	1 hour	0.18 ppm	100 ppb
Sulfur Dioxide (SO ₂)	Annual Average	--	0.03 ppm
	24 hours	0.04 ppm	0.14 ppm
	1 hour	0.25 ppm	75 ppb
Respirable Particulate Matter (PM ₁₀)	24 hours	50 mg/m ³	150 mg/m ³
	Annual Arithmetic Mean	20 mg/m ³	--
Fine Particulate Matter (PM _{2.5})	Annual Arithmetic Mean	12 mg/m ³	12 mg/m ³
	24 hours	--	35 mg/m ³
Sulfates	24 hours	25 mg/m ³	--

Pollutant	Average Time	California Standards	National Standards
Lead	30-day Average	1.5 mg/m ³	--
	Calendar Quarter	--	1.5 mg/m ³
	3-month Rolling Average	--	0.15 mg/m ³
Hydrogen Sulfide	1 hour	0.03 ppm	--
Vinyl Chloride	24 hours	0.010 ppm	--

Notes:

ppm = parts per million

ppb – parts per billion

mg/m³ = micrograms per cubic meter

mg/m³ = milligrams per cubic meter

Source: California Air Resources Board 2016

San Diego Air Pollution Control District

The SDAPCD was created to protect the public from the harmful effects of air pollution, achieve and maintain air quality standards, foster community involvement and develop and implement cost-effective programs that meet state and federal mandates while considering environmental and economic impacts.

Specifically, the SDAPCD is responsible for monitoring air quality and planning, implementing, and enforcing programs designed to attain and maintain state and federal ambient air quality standards in the district. Programs developed include air quality rules and regulations that regulate stationary source emissions, including area sources, point sources, and certain mobile source emissions. The SDAPCD is also responsible for establishing permitting requirements for stationary sources and ensuring that new, modified or relocated stationary sources do not create net emissions increases; and thus, are consistent with the region's air quality goals. The SDAPCD provides significance thresholds in Regulation II, Rule 20.2, Table 20-2-1. "AQIA Trigger Levels." These trigger levels were established for stationary sources of air pollution and are commonly used for environmental evaluations. The SDAPCD enforces air quality rules and regulations through a variety of means, including inspections, educational or training programs, or fines, when necessary. The project site is within the SDAB; and thus, is subject to SDAPCD rules and regulations.

State Implementation Plan/Air Quality Management Plan/Regional Air Quality Strategy

The federal Clean Air Act Amendments (CAAA) mandate that states submit and implement a State Implementation Plan (SIP) for areas not meeting air quality standards. SIPs are comprehensive plans that describe how an area will attain national and state ambient air quality standards. SIPs are a compilation of new and previously submitted plans, programs (i.e., monitoring, modeling and permitting programs), district rules, state regulations and federal

controls and include pollution control measures that demonstrate how the standards will be met through those measures.

State law makes CARB the lead agency for all purposes related to the SIP. Local air districts and other agencies prepare SIP elements and submit them to CARB for review and approval. CARB forwards SIP revisions to the USEPA for approval and publication in the Federal Register. Thus, the Regional Air Quality Strategy (RAQS) and Air Quality Management Plan (AQMP) prepared by SDAPCD and referenced herein become part of the SIP as the material relates to efforts ongoing in San Diego County to achieve the national and state ambient air quality standards. The most recent SIP element for San Diego County was submitted in December 2016. The document identifies control measures and associated emission reductions necessary to demonstrate attainment of the 2008 Federal 8-hour ozone standard by July 20, 2018.

The San Diego RAQS was developed pursuant to California Clean Air Act (CCAA) requirements. The RAQS was initially adopted in 1991 and was updated in 1995, 1998, 2001, 2004, 2009 and 2016. The 2022 RAQS update is under development. Until it is adopted, the 2016 is applicable and can be found at the following:

[https://www.sdapcd.org/content/dam/sdapcd/documents/grants/planning/2016%20RAQS%20\(1\).pdf](https://www.sdapcd.org/content/dam/sdapcd/documents/grants/planning/2016%20RAQS%20(1).pdf)

The RAQS identifies feasible emission control measures to provide progress in San Diego County toward attaining the State ozone standard. The pollutants addressed in the RAQS are volatile organic compounds (VOC) (also referred to as Reactive Organic Gases (ROG)) and oxides of nitrogen (NO_x), precursors to the photochemical formation of ozone (the primary component of smog). The RAQS was initially adopted by the SDAPCD on June 30, 1992, and amended on March 2, 1993, in response to ARB comments. At present, no attainment plan for particulate matter less than 10 microns in diameter (PM₁₀) or particulate matter less than 2.5 microns in diameter (PM_{2.5}) is required by the state regulations; however, SDAPCD has adopted measures to reduce particulate matter in the SDAB. These measures range from regulation against open burning to incentive programs that introduce cleaner technology. These measures can be found in a report titled "Measures to Reduce Particulate Matter in San Diego County, December 2005: <https://www.sdapcd.org/content/dam/sdapcd/documents/grants/planning/PM-Measures.pdf>

The RAQS relies on information from CARB and SANDAG, including mobile and area source emissions, as well as information regarding projected growth in the County, to estimate future emissions and then determine strategies necessary for the reduction of emissions through regulatory controls. CARB mobile source emission projections and SANDAG growth projections are based on population and vehicle trends as well as land use plans developed by the cities and the County as part of the development of the individual General Plans. As such, projects that propose development consistent with the growth anticipated by the general plans would be consistent with the RAQS. In the event that a project would propose development which is less dense than anticipated within the General Plan, the project would likewise be consistent with the RAQS. If a project proposes development that is greater than that

anticipated in the General Plan and SANDAG's growth projections, the project might conflict with the RAQS and SIP; and thus, have a potentially significant impact on air quality.

Under state law, the SDAPCD is required to prepare an AQMP for pollutants for which the SDAB is designated non-attainment. Each iteration of the SDAPCD's AQMP is an update of the previous plan and has a 20-year horizon. Currently the SDAPCD has implemented the *2020 Plan for Attaining the National Ambient Air Quality Standard for Ozone in San Diego County* (October 2020) and a 2004 Carbon Monoxide Plan. The 2020 ozone plan was submitted to CARB on October 20, 2020. It was adopted and submitted to the USEPA for review on December 28, 2020. Comments from the USEPA are pending. This plans is available for download on the ARB website located at the following URL:

[https://www.sdapcd.org/content/dam/sdapcd/documents/grants/planning/Att%20A%20\(Attainment%20Plan\)_ws.pdf](https://www.sdapcd.org/content/dam/sdapcd/documents/grants/planning/Att%20A%20(Attainment%20Plan)_ws.pdf)

SDAPCD Rules and Regulations

As stated above, SDAPCD is responsible for planning, implementing, and enforcing federal and state ambient standards in the SDAB. The following rules and regulations apply to all sources in the jurisdiction of SDAPCD, and would apply to the project.

SDAPCD Regulation IV: Prohibitions; Rule 50: Visible Emissions. Prohibits discharge into the atmosphere from any single source of emissions whatsoever any air contaminant for a period or periods aggregating more than 3 minutes in any period of 60 consecutive minutes that is darker in shade than that designated as Number 1 on the Ringelmann Chart, as published by the United States Bureau of Mines, or of such opacity as to obscure an observer's view to a degree greater than does smoke of a shade designated as Number 1 on the Ringelmann Chart (SDAPCD 1997).

SDAPCD Regulation IV: Prohibitions; Rule 51: Nuisance. Prohibits the discharge, from any source, of such quantities of air contaminants or other materials that cause or have a tendency to cause injury, detriment, nuisance, annoyance to people and/or the public, or damage to any business or property (SDAPCD 1976).

SDAPCD Regulation IV: Prohibitions; Rule 55: Fugitive Dust. Regulates fugitive dust emissions from any commercial construction or demolition activity capable of generating fugitive dust emissions, including active operations, open storage piles, and inactive disturbed areas, as well as track-out and carry-out onto paved roads beyond a project site (SDAPCD 2009b).

SDAPCD Regulation IV: Prohibitions; Rule 67.0.1: Architectural Coatings. Requires manufacturers, distributors, and end users of architectural and industrial maintenance coatings to reduce VOC emissions from the use of these coatings, primarily by placing limits on the VOC content of various coating categories (SDAPCD 2015).

SDAPCD Regulation XII: Toxic Air Contaminates; Rule 1200: Toxic Air Contaminants – New Source Review. Requires new or modified stationary source units with the potential to emit Toxic Air Contaminants (TACs) above rule threshold levels to either demonstrate that they will not increase the maximum incremental cancer risk above 1 in 1 million at every receptor location, or demonstrate that toxics best available control technology (T-BACT) will be employed if maximum incremental cancer risk is equal to or less than 10 in 1 million, or demonstrate compliance with SDAPCD’s protocol for those sources with an increase in maximum incremental cancer risk at any receptor location of greater than 10 in 1 million but less than 100 in 1 million (SDAPCD 2017b).

SDAPCD Regulation XII: Toxic Air Contaminates; Rule 1210: Toxic Air Contaminant Public Health Risks – Public Notification and Risk Reduction. Requires each stationary source that is required to prepare a public risk assessment to provide written public notice of risks at or above the following levels: maximum incremental cancer risks equal to or greater than 10 in 1 million, or cancer burden equal to or greater than 1.0, or total acute noncancer health hazard index equal to or greater than 1.0, or total chronic non-cancer health hazard index equal to or greater than 1.0 (SDAPCD 2017c).

Regional Climate and Local Air Quality

The weather of San Diego County is influenced by the Pacific Ocean and its semi-permanent high-pressure systems that result in dry, warm summers and mild, occasionally wet winters. The average minimum temperature for January ranges from the mid-40s to the high-50s degrees Fahrenheit (4 to 15 degrees Celsius) across the county. July maximum temperatures average in the mid-80s to the high-90s degrees Fahrenheit (high-20s to the high-30s degrees Celsius). Most of the county’s precipitation falls from November to April, with infrequent (approximately 10 percent) precipitation during the summer. The average seasonal precipitation along the coast is approximately 10 inches (254 millimeters); the amount increases with elevations as moist air is lifted over the mountains.

The interaction of ocean, land, and the Pacific High-Pressure Zone maintains clear skies for much of the year and drives the prevailing winds. Local terrain is often the dominant factor inland and winds in inland mountainous areas tend to blow upwards in the valleys during the day and down the hills and valleys at night.

In conjunction with the onshore/offshore wind patterns, there are two types of temperature inversions (reversals of the normal decrease of temperature with height), which occur within the region that affect atmospheric dispersive capability and that act to degrade local air quality. In the summer, an inversion at about 1,100 to 2,500 feet (335 to 765 meters) is formed over the entire coastal plain when the warm air mass over land is undercut by a shallow layer of cool marine air flowing onshore. The prevailing sunny days in this region further exacerbate the smog problem by inducing additional adverse photochemical reactions. During the winter, a nightly shallow inversion layer (usually at about 800 feet or 243 meters) forms between the

cooled air at the ground and the warmer air above, which can trap vehicular pollutants. The days of highest Carbon Monoxide (CO) concentrations occur during the winter months. The predominant onshore/offshore wind pattern is sometimes interrupted by so-called Santa Ana conditions, when high pressure over the Nevada-Utah region overcomes the prevailing westerly wind direction. This draws strong, steady, hot, and dry winds from the east over the mountains and out to sea. Strong Santa Ana winds tend to blow pollutants out over the ocean, producing clear days. However, at the onset or breakdown of these conditions or if the Santa Ana is weak, prevailing northwesterly winds are reestablished which send polluted air from the Los Angeles basin ashore in the SDAB. "Smog transport from the South Coast Air Basin (the metropolitan areas of Los Angeles, Orange, San Bernardino, and Riverside counties) is a key factor on more than half the days San Diego exceeds clean air standards" (San Diego Air Pollution Control District, 2010).

Pollutants

The SDAPCD is required to monitor air pollutant levels to ensure that air quality standards are met and, if they are not met, to develop strategies to meet the standards. Depending on whether the standards are met or exceeded, the local air basin is classified as being in "attainment" or "non-attainment." San Diego County is listed as a federal non-attainment area for ozone (eight hour) and a state non-attainment area for ozone (one hour and eight-hour standards), PM₁₀ and PM_{2.5}. As shown in Table 2, the SDAB is in attainment for the state and federal standards for nitrogen dioxide, carbon monoxide, sulfur dioxide and lead. Characteristics of ozone, carbon monoxide, nitrogen dioxide, and suspended particulates are described below.

Ozone. Ozone is produced by a photochemical reaction (triggered by sunlight) between nitrogen oxides (NO_x) ROG¹. Nitrogen oxides are formed during the combustion of fuels, while reactive organic compounds are formed during combustion and evaporation of organic solvents. Because ozone requires sunlight to form, it mostly occurs in concentrations considered serious between the months of April and October. Ozone is a pungent, colorless, toxic gas with direct health effects on humans including respiratory and eye irritation and possible changes in lung functions. Groups most sensitive to ozone include children, the elderly, people with respiratory disorders, and people who exercise strenuously outdoors.

Carbon Monoxide. Carbon monoxide (CO) is a local pollutant that is found in high concentrations only near the source. The major source of carbon monoxide, a colorless, odorless, poisonous gas, is automobile exhaust. Elevated CO concentrations; therefore, are usually only found near areas of high traffic volumes operating in congested conditions. Carbon monoxide health effects are related to blood hemoglobin. At high concentrations, carbon monoxide

¹ Organic compound precursors of ozone are routinely described by a number of variations of three terms: hydrocarbons (HC), organic gases (OG), and organic compounds (OC). These terms are often modified by adjectives such as total, reactive, or volatile, and result in a rather confusing array of acronyms: HC, THC (total hydrocarbons), RHC (reactive hydrocarbons), TOG (total organic gases), ROG (reactive organic gases), TOC (total organic compounds), ROC (reactive organic compounds), and VOC (volatile organic compounds). While most of these differ in some significant way from a chemical perspective, from an air quality perspective two groups are important: non-photochemically reactive in the lower atmosphere, or photochemically reactive in the lower atmosphere (HC, RHC, ROG, ROC, and VOC).

reduces the amount of oxygen in the blood, causing heart difficulties in people with chronic diseases, reduced lung capacity and impaired mental abilities.

Nitrogen Dioxide. Nitrogen dioxide (NO₂) is a by-product of fuel combustion, with the primary source being motor vehicles and industrial boilers and furnaces. The principal form of nitrogen oxide produced by combustion is nitric oxide (NO), but NO reacts rapidly to form NO₂, creating the mixture of NO and NO₂ commonly called NO_x. Nitrogen dioxide is an acute irritant. A relationship between NO₂ and chronic pulmonary fibrosis may exist and an increase in bronchitis in young children at concentrations below 0.3 parts per million (ppm) may occur. Nitrogen dioxide absorbs blue light and causes a reddish-brown cast to the atmosphere and reduced visibility. It can also contribute to the formation of PM₁₀ and acid rain.

**Table 2
San Diego County Attainment Status**

Criteria Pollutant	Federal Designation	State Designation
Ozone (one hour)	Attainment*	Non-Attainment
Ozone (eight hour)	Moderate Non-Attainment	Non-Attainment
Carbon Monoxide	Attainment	Attainment
PM ₁₀	Unclassifiable**	Non-Attainment
PM _{2.5}	Attainment	Non-Attainment
Nitrogen Dioxide	Attainment	Attainment
Sulfur Dioxide	Attainment	Attainment
Lead	Attainment	Attainment
Sulfates	No Federal Standard	Attainment
Hydrogen Sulfide	No Federal Standard	Unclassified
Visibility	No Federal Standard	Unclassified

* The federal 1-hour standard of 12 ppm was in effect from 1979 through June 1, 2005. The revoked standard is referenced here because it was used for such a long period and because this benchmark is addressed in State Implementation Plans (SIPs).

** At the time of designation, if the available data does not support a designation of attainment or non-attainment, the area is designated as unclassifiable.

Source: San Diego Air Pollution Control District. June 2016. <http://www.sandiegocounty.gov/content/sdc/apcd/en/air-quality-planning/attainment-status.html>

Suspended Particulates. PM₁₀ is particulate matter measuring no more than 10 microns in diameter, while PM_{2.5} is fine particulate matter measuring no more than 2.5 microns in diameter. Suspended particulates are mostly dust particles, nitrates and sulfates. Both PM₁₀ and PM_{2.5} are by-products of fuel combustion and wind erosion of soil and unpaved roads and are directly emitted into the atmosphere through these processes. Suspended particulates are also created in the atmosphere through chemical reactions. The characteristics, sources, and potential health effects associated with the small particulates (those between 2.5 and 10 microns in diameter) and fine particulates (PM_{2.5}) can be very different. The small particulates generally come from windblown dust and dust kicked up from mobile sources. The fine particulates are generally associated with combustion processes as well as being formed in the atmosphere as a secondary pollutant through chemical reactions. Fine particulate matter is more likely to penetrate deeply into the lungs and poses a health threat to all groups, but particularly to the

elderly, children, and those with respiratory problems. More than half of the small and fine particulate matter that is inhaled into the lungs remains there. These materials can damage health by interfering with the body's mechanisms for clearing the respiratory tract or by acting as carriers of an absorbed toxic substance.

Lead. Lead in the atmosphere occurs as particulate matter. Sources of lead include leaded gasoline; the manufacturing of batteries, paints, ink, ceramics, and ammunition; and secondary lead smelters. Prior to 1978, mobile emissions were the primary source of atmospheric lead. Between 1978 and 1987, the phaseout of leaded gasoline reduced the overall inventory of airborne lead by nearly 95%. With the phaseout of leaded gasoline, secondary lead smelters, battery recycling, and manufacturing facilities are becoming lead-emissions sources of greater concern. Prolonged exposure to atmospheric lead poses a serious threat to human health. Health effects associated with exposure to lead include gastrointestinal disturbances, anemia, kidney disease, and, in severe cases, neuromuscular and neurological dysfunction. Of particular concern are low-level lead exposures during infancy and childhood. Such exposures are associated with decrements in neurobehavioral performance, including intelligence quotient performance, psychomotor performance, reaction time, and growth. Children are highly susceptible to the effects of lead.

Sulfates. Sulfates are the fully oxidized form of sulfur, which typically occur in combination with metals or hydrogen ions. Sulfates are produced from reactions of SO₂ in the atmosphere. Sulfates can result in respiratory impairment, as well as reduced visibility.

Vinyl Chloride. Vinyl chloride is a colorless gas with a mild, sweet odor, which has been detected near landfills, sewage plants, and hazardous waste sites, due to the microbial breakdown of chlorinated solvents. Short-term exposure to high levels of vinyl chloride in air can cause nervous system effects, such as dizziness, drowsiness, and headaches. Long-term exposure through inhalation can cause liver damage, including liver cancer.

Hydrogen Sulfide. Hydrogen sulfide is a colorless and flammable gas that has a characteristic odor of rotten eggs. Sources of hydrogen sulfide include geothermal power plants, petroleum refineries, sewers, and sewage treatment plants. Exposure to hydrogen sulfide can result in nuisance odors, as well as headaches and breathing difficulties at higher concentrations.

Visibility-Reducing Particles. Visibility-reducing particles are any particles in the air that obstruct the range of visibility. Effects of reduced visibility can include obscuring the viewshed of natural scenery, reducing airport safety, and discouraging tourism. Sources of visibility-reducing particles are the same as for PM_{2.5} described above.

Toxic Air Contaminants/Diesel Particulate Matter. Hazardous air pollutants, also known as TACs or air toxics, are those pollutants that are known or suspected to cause cancer or other serious health effects, such as reproductive effects or birth defects, or adverse environmental effects. Examples of toxic air pollutants include:

1. benzene, which is found in gasoline;
2. perchloroethylene, which is emitted from some dry-cleaning facilities; and
3. methylene chloride, which is used as a solvent.

Transportation related emissions are focused on particulate matter constituents within diesel exhaust and TAC constituents that comprise a portion of total organic gas (TOG) emissions from both diesel and gasoline fueled vehicles. Diesel engine emissions are comprised of exhaust particulate matter and TOGs which are collectively defined as Diesel Particulate Matter (DPM). DPM and TOG emissions from both diesel and gasoline fueled vehicles is typically composed of carbon particles and carcinogenic substances including polycyclic aromatic (i.e., odorous) hydrocarbons, benzene, formaldehyde, acetaldehyde, acrolein, and 1,3-butadiene. Diesel exhaust also contains gaseous pollutants, including volatile organic compounds and NO_x.

Sensitive Receptors

Land uses considered to be sensitive receptors include residential, school, childcare centers, acute care hospitals, and long-term health care facilities. Sensitive receptors are determined based upon special factors which may include the age of the users or occupants, the frequency and duration of the use or occupancy, continued exposure to hazardous substances as defined by federal and state regulations, and the user's ability to evacuate a specific site in the event of a hazardous incident. Ambient air quality standards have been established to represent the levels of air quality considered sufficient, with an adequate margin of safety, to protect public health and welfare. They are designed to protect that segment of the public most susceptible to respiratory distress, such as children; the elderly; persons engaged in strenuous work or exercise and people with cardiovascular and chronic respiratory diseases. Recreational uses can be considered moderately sensitive to air pollution. Exercise can place a high demand on respiratory functions, which can be impaired by air pollution even though exposure periods during exercise are generally short. Residential uses are considered most sensitive to air pollution while Industrial and commercial areas are considered the least sensitive to air pollution. Exposure periods are relatively short and intermittent, as the majority of the workers tend to stay indoors most of the time. The closest receivers are multi-family apartments/condominiums located in the buildings adjacent to and west of the site and the Sea Breeze Apartments located adjacent to and east of the site.

Monitored Air Quality

The SDAPCD monitors air quality conditions at locations throughout the SDAB. For this analysis, data from the Camp Pendleton monitoring station north of the site were used to characterize existing ozone and PM_{2.5} conditions in the vicinity of the project site. A summary of PM₁₀ data recorded at the 533 First Street El Cajon monitoring station is presented in Table 3.

AIR QUALITY IMPACT ANALYSIS

Methodology and Significance Thresholds

Air quality modeling was performed in general accordance with the methodologies outlined in the SDAPCD 2016 RAQS to identify both construction and operational emissions associated with each phase and the cumulative total of all project phases at build out. All emissions were calculated using the California Emissions Estimator Model (CalEEMod) software version 2022.1 which incorporates current air emission data, planning methods and protocol approved by CARB.

**Table 3
 Measured Air Quality Data**

Averaging Time	Unit	Agency/ Method	Ambient Air Quality Standard	Measured Concentration by Year			Exceedances by Year		
				2020	2021	2022	2020	2021	2022
Ozone (O ₃) – Camp Pendleton									
Maximum 1-hour concentration	ppm	State	0.09	0.094	0.074	0.076	0	0	0
Maximum 8-hour concentration	ppm	State	0.070	0.074	0.059	0.067	3	0	0
		Federal	0.070	0.074	0.059	0.067	3	0	0
Nitrogen Dioxide (NO ₂) – Camp Pendleton									
Maximum 1-hour concentration	ppm	State	0.18	53	59	50	0	0	0
		Federal	0.100	53	59	50	0	0	0
Coarse Particulate Matter (PM ₁₀) ^a – El Cajon – Lexington Elementary School, 533 First Street									
Maximum 24-hour concentration	µg/m ³	State	50		--	--	-	-	-
		Federal	150		--	--	-	-	-
Annual concentration	µg/m ³	State	20	--	--	--	--	--	--
Fine Particulate Matter (PM _{2.5}) ^a – El Cajon – Lexington Elementary School, 533 First Street									
Maximum 24-hour concentration	µg/m ³	Federal	35	38.2	30.2	26.4	2	0	0
Annual concentration	µg/m ³	State	12.0	11.6	10.4	-	0	0	-
		Federal	12.0	10.3	9.7	9.4	0	0	0

¹ – Federal O3 standard reduced from 75 ppm to 70 ppm in October 2015

*Insufficient data to determine number of exceedances

Ozone and Nitrogen Oxide data from the Camp Pendleton Monitoring Station. PM10 and PM2.5 data from 533 First Street in El Cajon.

Source: California Air Resources Board, 2020, 2021 and 2022 Air Quality Data Summaries available at:

<http://www.arb.ca.gov/adam/topfour/topfourdisplay.php> Accessed May 1, 2024.

Construction activities would include removal of the existing residence and out buildings, site clearing and grading to install the building foundation and utility connections; construction of the new buildings and related improvements as well as painting the interior and exterior building surfaces and minor pavement work for the entrance/exit. Construction activities would require the use of equipment that would generate criteria air pollutant emissions. For modeling purposes, it was assumed that all construction equipment used would be diesel-powered. Construction emissions associated with development of the proposed project were quantified by estimating the types of equipment, including the number of individual pieces of equipment, that would be used on-site during each of the construction phases as well as off-site haul trips to remove demolition debris. Construction emissions are analyzed using the regional thresholds established by the SDAPCD and published under Rule 20-2. No soil import/export would be required.

Operational emissions include mobile source emissions, energy emissions, and area source emissions. Mobile source emissions are generated by motor vehicle trips associated with operation of the project. Emissions attributed to energy use include electricity and natural gas consumption for space and water heating. Area source emissions are generated by landscape maintenance equipment, consumer products and architectural coatings (i.e., paints). To determine whether a regional air quality impact would occur, the increase in emissions are compared with the SDAPCD recommended regional thresholds for operational emissions.

Regional Thresholds. Based on Appendix G of the *CEQA Guidelines (2022)*, a project would have a significant air quality impact if it would:

- a. *Conflict with or obstruct implementation of the applicable air quality plan;*
- b. *Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard;*
- c. *Expose sensitive receptors to substantial pollutant concentrations;*
- d. *Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.*

Appendix G of the CEQA Guidelines (14 CCR 15000 et seq.) indicates that, where available, the significance criteria established by the applicable air quality management district or pollution control district may be relied upon to determine whether the project would have a significant impact on air quality. As part of its air quality permitting process, SDAPCD has established thresholds in Rule 20.2 requiring the preparation of Air Quality Impact Assessments for permitted stationary sources. SDAPCD establishes quantitative emission thresholds for stationary sources. Although these trigger levels do not generally apply to mobile sources or general land development projects, for comparative purposes these levels may be used to evaluate the increased emissions that would be emitted into the SDAB from proposed land

development projects. Project-related air quality impacts estimated in this environmental analysis would be considered significant if any of the applicable significance thresholds presented below in Table 4 are exceeded.

The thresholds listed in Table 4 are screening-level thresholds used to evaluate whether proposed-project-related emissions could cause a significant impact to air quality. Emissions below the screening-level thresholds would not cause a significant impact. The emissions-based thresholds for ozone precursors (ROG and NOx) are intended to serve as the threshold for ozone. This approach is used because ozone is not emitted directly; thus, ozone concentrations

Table 4
SDAPCD Air Emission Significance Thresholds

Construction Emissions			
Pollutant	Total Emissions (pounds per day)		
Reactive Organic Gas (ROG)	75		
Nitrogen Oxides (NOx)	250		
Carbon Monoxide (CO)	550		
Sulfur Oxides (SOx)	250		
Respirable Particulate Matter (PM ₁₀)	100		
Fine Particulate Matter (PM _{2.5})	55		
Operational Emissions			
	Total Emissions		
	Pounds per Hour	Pounds per Day	Tons per Year
Reactive Organic Gas (ROG)	--	75	13.7
Nitrogen Oxides (NOx)	25	250	40
Carbon Monoxide (CO)	100	550	100
Sulfur Oxides (SOx)	25	250	40
Respirable Particulate Matter (PM ₁₀)	--	100	15
Fine Particulate Matter (PM _{2.5})	--	55	10
Lead and Lead Compounds	--	3.2	0.6

associated with individual projects precursor (ROG and NOx) emissions cannot be determined through air quality models or other quantitative methods. For nonattainment pollutants, if emissions exceed the thresholds shown in Table 4, the project has the potential to result in a cumulatively considerable net increase in these pollutants; and thus, could have a significant impact on the ambient air quality.

With respect to odors, SDAPCD Rule 51 (Public Nuisance) prohibits emission of any material that causes nuisance to a considerable number of persons or endangers the comfort, health, or safety of any person. A project that involves a use that would produce objectionable odors would be deemed to have a significant odor impact if it would affect a considerable number of off-site receptors.

a. Would the project conflict with or obstruct implementation of the applicable air quality plan?

As stated, under state law, the SDAPCD is required to prepare an AQMP for pollutants for which the SDAB is designated non-attainment. Each iteration of the SDAPCD's AQMP is an update of the previous plan and has a 20-year horizon. A project may be deemed inconsistent with the AQMP if it would generate population, housing, or employment growth exceeding forecasts used in the development of the AQMP. Currently the SDAPCD has implemented the *2020 Plan for Attaining the National Ambient Air Quality Standard for Ozone in San Diego County* (October 2020) and a 2004 Carbon Monoxide Plan. The AQMP incorporates local city General Plans and the San Diego Association of Governments socioeconomic forecast projections of regional population, housing and employment growth.

The proposed project involves the construction of 21 new three-story multifamily townhome units. The site is approximately 0.9 acres in size with General Plan designation of R-23 and a zoning designation of R-3. The intent of the R-3 zoning designation is to accommodate high density residential at a density not to exceed that allowed by the General Plan (i.e., 23 units per acre).

According to the 2021-2029 Regional Housing Needs Assessment (RHNA) 6th cycle, the City of Carlsbad will need to accommodate a total of 3,873 units at varying income levels (City of Carlsbad, April 2022). Of the total, 1,778 units are allocated to the moderate and above moderate-income categories. The project would provide 21 units or just over one percent of Carlsbad's housing allocation within the 2021-2029 RHNA.

The San Diego APCD and San Diego Association of Governments are responsible for developing and implementing the clean air plans for attainment and maintenance of the ambient air quality standards in the basin, specifically, the SIP and RAQS. The federal O₃ maintenance plan, which is part of the SIP, was adopted in 2012. The most recent O₃ attainment plan was adopted in 2020. The SIP includes a demonstration that current strategies and tactics will maintain acceptable air quality in the basin based on the NAAQS. The RAQS was initially adopted in 1991 and is updated on a triennial basis (most recently in 2016). The RAQS outlines SDAPCD's plans and control measures designed to attain the state air quality standards for O₃. The SIP and RAQS rely on information from CARB and SANDAG, including mobile and area source emissions as well as information regarding projected growth in the County and the cities in the County, to project future emissions and determine the strategies necessary for the reduction of emissions through regulatory controls.

CARB mobile source emission projections and SANDAG growth projections are based on population, vehicle trends and land use plans developed by the County and the cities in the County as part of the General Plan development process. If a project proposes development that is greater than that anticipated in the local plan and SANDAG's growth projections, the project

might be in conflict with the SIP and RAQS and may contribute to a potentially significant cumulative impact on air quality.

As stated, the R-3 zoning designation is intended to support multifamily uses. Thus, the project is consistent with City's General Plan the land use designation/zoning; and therefore, has been factored into SANDAG's growth projections. Furthermore, the estimated increase in population, employment and housing generated by the project was compared to SANDAG's Regional Plan population, employee population, and housing estimates including the years 2025 and 2035. The number of housing units in the City was projected to be 49,299 in 2025 and 51,552 in 2035, or an increase in 2,253 housing units over the 10-year period. Furthermore, the City's population was projected to be 118,068 residents in 2025 and 118,719 residents in 2035, or increase of 651 residents over the period as shown in the SANDAG *Series 14 Regional Forecast and Baseline Subregional Allocation*. The average household size is 2.82 people per dwelling unit. The project would construct 21 dwelling units, which would have the potential to house approximately 59 residents. Both the units and population are within the growth projections.

The employee population in the City was projected to be 88,373 in 2025 and 98,168 in 2035, or increase of 9,795 employees over the period. Because the project is consistent with the General Plan; and thus, SANDAG's growth projections, project emissions would not conflict with the SIP and RAQS. The project would not conflict with or obstruct implementation of the AQMP. Impacts would be less than significant.

b. Would the project result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard?

Construction Emissions

Project construction would generate temporary air pollutant emissions. These impacts are associated with fugitive dust (PM₁₀ and PM_{2.5}) and exhaust emissions from heavy construction vehicles, work crew vehicle trips in addition to ROG that would be released during the drying phase upon application of paint and other architectural coatings. Construction would generally consist of demolition (i.e., removal of the temporary buildings), site preparation (clearing/grubbing), excavation/grading, construction of the proposed buildings, architectural coating (i.e., paint) application and paving.

Emissions from the construction phase of the project were estimated using CalEEMod 2022.1. Construction scenario assumptions, including phasing, equipment mix, and vehicle trips, were based on information provided by the project applicant and CalEEMod default values when project specifics were not known.

For purposes of estimating project emissions, it is assumed that construction of the project would occur five days per week and commence in January 2025 and would be complete in late

2025. The schedule is an estimate calculated by CalEEMod 2022.1. The duration of phases are approximated:

- Demolition: 4 weeks
- Site Preparation: 1 week
- Grading: 1 week
- Building Construction: 40 weeks
- Paving: 2 weeks
- Architectural Coating: 7 weeks

Construction-worker and vendor trips estimates by construction phase were based on CalEEMod default data. Mass grading would include the entire project site. Approximately 13 total trips would be required to remove demolition material. No fill import is anticipated during the site preparation or grading phases. CalEEMod default trip length values were used for the distances for all construction-related trips. Defaults for the construction equipment mix and vehicle trips used for estimating the project-generated construction emissions were used and are provided in Appendix A.

As discussed, the project would implement dust control strategies as a project design feature. To reflect implementation of proposed dust control strategies, the following was used in CalEEMod:

- Water exposed area two times per day (55% reduction in PM10 and PM2.5); and
- Limit equipment idling to 5 minutes.

Daily construction emissions are shown in Table 5.

Table 5
Estimated Maximum Daily Construction Emissions with Dust Control Measures

Construction Phase	Maximum Emissions (lbs/day)					
	ROG	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
2025 Maximum lbs/day	4.4	10.0	12.2	0.02	0.56	.37
<i>SDAPCD Regional Thresholds</i>	75	250	550	250	100	55
Threshold Exceeded 2022	No	No	No	No	No	No

As shown in Table 5, construction of the proposed project would not exceed the SDAPCD daily thresholds. With SDAPCD Rule 55 compliance, federal, state and local construction emission thresholds would be met. Construction emissions would not result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-

attainment under an applicable federal or state ambient air quality standard. Impacts will be **less than significant**.

Operational Impacts

Emissions from the operational phase of the project were estimated using CalEEMod version 2022.1. Operational year 2025 was assumed consistent with completion of project construction.

Area Sources. CalEEMod was used to estimate operational emissions from area sources, including emissions from consumer product use, architectural coatings, and landscape maintenance equipment. Emissions associated with space heating and water heating are calculated in the building energy use module of CalEEMod.

Consumer products are chemically formulated products used by household and institutional consumers, including detergents; cleaning compounds; polishes; floor finishes; cosmetics; personal care products; home, lawn, and garden products; disinfectants; sanitizers; aerosol paints; and automotive specialty products. Other paint products, furniture coatings, or architectural coatings are not considered consumer products. Consumer product VOC emissions are estimated in CalEEMod based on the floor area of buildings and on the default factor of pounds of VOC per building square foot per day. The CalEEMod default values for consumer products were used.

VOC off-gassing emissions result from evaporation of solvents contained in surface coatings such as paints and primers used during building maintenance. CalEEMod calculates the VOC evaporative emissions from application of surface coatings based on the VOC emission factor, the building square footage, the assumed fraction of surface area, and the reapplication rate. VOC emissions were estimated based on compliance with SDAPCD Rule 67.0.1 which limits the VOC concentrations of various coatings sold and used in San Diego County. Rule 67.0.1, Table 1, lists numerous types of coatings and the allowable VOC concentrations in grams/litre (g/L). The three general coating categories are 50 grams per liter (g/L) VOC for flat coatings, 100 g/L VOC for non-flat coatings and 150 g/L VOC for non-flat high gloss coatings. Consistent with typical construction practices, it is anticipated that interior and exterior paint would not exceed non-flat coating limits, exterior paint would not exceed non-flat coating limits and a small portion of exterior paint and finishes (trim and other minor finishes) would not exceed non-flat high-gloss coatings limits. The interior and exterior coatings were estimated to have 50 g/L VOC while the traffic marking coatings were estimated to be limited to 100 g/L VOC. The default values in CalEEMod 2022.1 rely on compliance with SDAPCD Rule 67.0.1 referenced above.

Energy Sources. Energy sources include emissions associated with building electricity and natural gas use. Electricity use would contribute indirectly to criteria air pollutant emissions; however, the emissions from electricity use are only quantified for GHGs in CalEEMod, since criteria pollutant emissions occur at the site of the power plant, which is typically off site. The Project will install Energy Star, or equivalent, dishwashers, clothes washers, refrigerators, and fans; bicycle parking facilities and electric vehicle charging station.

Mobile Sources. CalEEMod default data, including trip characteristics, trip lengths, variable start information and emissions factors were used for the model inputs. Project-related traffic includes the mixture of vehicles consistent with CalEEMod default vehicle fleet assumptions. Emission factors for 2026 (the first full year of project operation) were used to estimate emissions associated with full buildout of the project. Trip data used are 7.3 daily trips per unit. Based on proximity to transit, these data likely provide a conservative estimate of daily trips.

Table 6 summarizes area, energy and mobile source emissions associated with operation of the proposed project. As shown in Table 6, daily emissions would not exceed the SDAPCD thresholds for ROG, NO_x, CO, SO_x, PM₁₀ or PM_{2.5}. Therefore, the project's air quality emissions (including impacts related to criteria pollutants, sensitive receptors and violations of air quality standards) would not result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard. Impacts will be less than significant.

**Table 6
 Estimated Operational Emissions**

	Estimated Emissions (lbs/day)					
	ROG	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
<i>Proposed Project</i>						
Maximum lbs/day - 2025	1.4	0.6	5.1	0.01	1.1	0.29
<i>SDAPCD Thresholds</i>	75	250	550	250	100	55
Threshold Exceeded?	No	No	No	No	No	No
Maximum lbs/hour	--	0.025	0.21	0.0004	--	--
<i>SDACPD Thresholds</i>	--				--	--
Threshold Exceeded?	No	No	No	No	No	No
Maximum tons/year	0.26	0.11	0.93	0.001	0.20	0.05
<i>SDAPCD Thresholds</i>	13.7	40	100	40	15	10
Threshold Exceeded?	No	No	No	No	No	No

See Appendix for CalEEMod version. 2022.1 computer model output - summer emissions shown

c. Would the project expose sensitive receptors to substantial pollutant concentrations?

Construction-Related Toxic Air Contaminant Impacts

Certain construction projects can create the potential for toxic air contaminant emissions related to diesel particulate emissions associated with heavy equipment operations during construction. According to South Coast Air Quality Management District (SCAQMD)

methodology, health effects from carcinogenic air toxics are usually described in terms of “individual cancer risk”. A cancer risk greater than 10 cases per 1,000,000 people exposed would be considered a significant impact. The California Office of Environmental Health Hazard Assessment (OEHHA) health risk guidance states that a residential receptor should be evaluated based on a 30-year exposure period. “Individual Cancer Risk” is the likelihood that a person exposed to concentrations of toxic air contaminants over a 70-year lifetime will contract cancer, based on the use of standard risk-assessment methodology. The estimated construction schedule duration would be approximately 11-12 months; however, only a portion of the overall construction work would require the use of diesel-powered equipment. The proposed project would not result in a long-term (i.e., 30 or 70 year) exposure to a substantial source of toxic air contaminant emissions; and thus, neighboring residents would not be exposed to the related individual cancer risk. Further, existing and planned land use within the project area is focused on residential and supporting commercial uses. Thus, existing and future residents would not be exposed to neighboring development that generates TACs. Therefore, the project would not expose sensitive receptors to substantial concentrations of TACs. Impacts would be less than significant.

Carbon Monoxide Hotspots

As discussed, carbon monoxide is a colorless, odorless, poisonous gas that may be found in high concentrations near areas of high traffic volumes. CO emissions are a function of vehicle idling time, meteorological conditions, and traffic flow. The SDAB is in attainment of state and federal CO standards; thus, CO data is no longer collected and not all monitoring stations have CO data available. The East Valley monitoring station in Escondido is the closest monitoring station to the site that collected CO data. The maximum 8-hour average CO level recorded in 2015, was 2.0 parts per million (ppm). Concentrations at that time were below the 9-ppm state and federal 8-hour standard.

Numerous factors are related to the formation of CO hotspots. The potential for CO hotspots in the SDAB is steadily decreasing because of the continued improvement in vehicular emissions at a rate faster than the rate of vehicle growth and/or congestion and the already very low ambient CO concentrations. Furthermore, CO transport is extremely limited and disperses rapidly with distance from the source. Under certain extreme meteorological conditions, however, CO concentrations near a congested roadway or intersection may reach unhealthy levels.

Typically, high CO concentrations are associated with roadways or intersections operating under congested conditions. Projects contributing to adverse traffic conditions may contribute to the formation of CO hotspots. Because the City of Carlsbad does not have CO hotspot guidance, the guidance recommended by the County of San Diego was applied to evaluate the potential for CO hotspots to occur as a result of the project. As indicated in the County of San Diego Guidelines for Determining Significance and Report Format and Content Requirements Air Quality (County of San Diego 2007), a site-specific CO hotspot analysis should be

performed if a proposed development would cause road intersections to operate at or below a LOS E with intersection peak-hour trips exceeding 3,000.

The proposed project screened out of preparation of a traffic study per the Vehicle Miles Traveled (VMT) Analysis Guidelines (May 2023); thus, it is not expected to adversely impact traffic volumes or traffic operation proximal to the site or otherwise result in CO hot spots that could expose sensitive receptors to substantial pollutant concentrations. Impacts would be less than significant.

Indoor Air Quality

CARB has stated that the control measures it has approved for reducing indoor emissions associated with the use of composite wood products, including formaldehyde, provides a level of control that protects health and safety. The first emission standards (Phase 1) went into effect in 2009 and more stringent Phase 2 standards are now in effect for all composite wood panels and finished goods sold in California. CARB regulations include provisions for no-added formaldehyde and ultra-low emitting formaldehyde-based resins, to encourage the use of these lower-emitting resins in composite wood products. Further, the project would be constructed using the most current ventilation requirements found in the Title 24 standards, including the requirement that new developments use MERV 13 or higher air filters and include mandatory compliance with the stringent CARB Phase 2 emission standards. Thus, the use of composite wood project will have no adverse impact on indoor air quality.

d. Would the project result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

The State of California Health and Safety Code, Division 26, Part 4, Chapter 3, Section 41700, SDAPCD Rule 51, and City of Carlsbad Municipal Code Section 6.16.010, commonly referred to as public nuisance law, prohibits emissions from any source whatsoever in such quantities of air contaminants or other material that cause injury, detriment, nuisance, or annoyance to the public health or damage to property. Projects required to obtain permits from SDAPCD are evaluated by SDAPCD staff for potential odor nuisance, and conditions may be applied (or control equipment required) where necessary to prevent occurrence of public nuisance. SDAPCD Rule 51 also prohibits emission of any material that causes nuisance to a considerable number of persons or endangers the comfort, health, or safety of any person. A project that involves a use that would produce objectionable odors would be deemed to have a significant odor impact if it would affect a considerable number of off-site receptors. Odor issues are subjective by the nature of odors themselves and due to the fact that their measurements are difficult to quantify. As a result, this guideline is qualitative and will focus on the existing and potential surrounding uses and location of sensitive receptors.

The occurrence and severity of potential odor impacts depends on numerous factors. The nature, frequency, and intensity of the source; the wind speeds and direction; and the sensitivity of receiving location each contribute to the intensity of the impact. Although offensive odors

seldom cause physical harm, they can be annoying and cause distress among the public and generate citizen complaints. Odors would be potentially generated from vehicles and equipment exhaust emissions during construction of the project. Potential odors produced during construction would be attributable to exhaust emissions, architectural coatings, and asphalt pavement application. Such odors would disperse rapidly from the project site and generally occur at magnitudes that would not affect substantial numbers of people. Therefore, project construction activities would not result in other emissions (such as those leading to odors) adversely affecting a substantial number of people. Impacts would be less than significant.

Land uses that typically are associated with odor complaints include agricultural uses, wastewater treatment plants, food processing plants, chemical plants, industrial activities, composting, refineries, landfills, dairies, and fiberglass molding facilities. The project would construct and operate 21 multifamily residential units and related infrastructure improvements. The project would not include land uses that typically result in emissions (such as those leading to odors) that adversely affect a substantial number of people; thus, impacts would be **less than significant**.

GREENHOUSE GAS EMISSIONS ASSESSMENT

The purpose of this report is to demonstrate that the Project meets the conditions for a Class 32 categorical exemption for air quality. The following analysis provides GHG emissions from construction and operational activities for informational purposes only.

Methodology

GHG emissions associated with construction and operation of the proposed project and existing development have been estimated using California Emissions Estimator Model (CalEEMod) version 2022.1.

Construction Emissions

Construction of the proposed project would generate temporary GHG emissions primarily associated with the operation of construction equipment, worker trips and truck trips required for hauling excavation spoils, materials and equipment. Site preparation and grading typically generate the greatest emission quantities because the use of heavy equipment is greatest during this phase of construction. Emissions associated with the construction period were estimated based on the projected maximum amount of equipment that would be used on-site at one time. Air districts such as the SDAPCD have recommended amortizing construction-related emissions over a 30-year period to calculate annual emissions. Complete CalEEMod results and assumptions can be viewed in the Appendix.

Operational Emissions

Default values used in CalEEMod version 2022.1 are based on the CEC sponsored California Commercial End Use Survey (CEUS) and Residential Appliance Saturation Survey (RASS) studies. CalEEMod provides operational emissions of CO₂, N₂O and CH₄. This methodology has been subjected to peer review by numerous public and private stakeholders, and in particular by the CEC; and therefore, is considered reasonable and reliable for use in GHG impact analysis pursuant to CEQA. It is also recommended by CAPCOA (January 2008).

Emissions associated with area sources (i.e., consumer products, landscape maintenance, and architectural coating) were calculated in CalEEMod based on standard emission rates from CARB, USEPA, and district supplied emission factor values (CalEEMod User Guide, 2022). Emissions from waste generation were also calculated in CalEEMod and are based on the IPCC's methods for quantifying GHG emissions from solid waste using the degradable organic content of waste (CalEEMod User Guide, April 2022). Waste disposal rates by land use and overall composition of municipal solid waste in California was primarily based on data provided by the California Department of Resources Recycling and Recovery (CalRecycle).

Emissions from water and wastewater usage calculated in CalEEMod were based on the default electricity intensity from the CEC's 2006 Refining Estimates of Water-Related Energy Use in California using the average values for Northern and Southern California. Emissions from mobile sources were quantified based on trip generation rates in the Local Transportation Analysis (March 2022).

Construction Emissions. Construction activity analysis is based on the anticipated construction period beginning in summer 2025 and in early 2026. For modeling purposes, the construction duration was conservatively assumed to occur in 2025. Based on CalEEMod results, construction activity for the project would generate an estimated 227 metric tons of carbon dioxide equivalent (CO₂E) in 2025 as shown in Table 7. Amortized over a 30-year period (the assumed life of the project), construction of the proposed project would generate 8 metric tons of CO₂E per year.

Table 7
Estimated Construction Related Greenhouse Gas Emissions

Year	Annual Emissions (metric tons CO₂E)
2025	227
Total	227
Amortized over 30 years	8

See Appendix for CalEEMod software program output

Operational Indirect and Stationary Direct Emissions. Operational emissions relate to energy use, solid waste, water use, and transportation. Each source is discussed below and includes the emissions associated with existing development and the anticipated emissions that would result from the proposed project.

Energy Use. CalEEMod default values for electricity use and natural gas consumption for each land use type were applied for the proposed land use designation. The energy use from residential and commercial land uses is calculated in CalEEMod based on the Commercial End-Use Survey. Energy use in buildings (both natural gas and electricity) is divided by CalEEMod into end-use categories subject to Title 24 requirements (end uses associated with the building envelope, such as the HVAC system, water heating system, and integrated lighting) and those not subject to Title 24 requirements (such as appliances, electronics, and miscellaneous “plug-in” uses).

Operational GHG emissions from energy sources include natural gas combustion for appliances and space and water heating. The current Title 24, Part 6 standards, referred to as the 2022 Title 24 Building Energy Efficiency Standards, became effective on January 1, 2023. The current version of CalEEMod calculates electricity and natural gas emissions based on consumption estimates and Title 24 2019 Building Energy Efficiency Standards (CalEEMod Users Guide, 2022). CalEEMod default energy intensity factors (CO₂, CH₄, and N₂O mass emissions per kilowatt hour) for SDG&E were based on the value for SDG&E’s energy mix in 2021. As shown in Table 8, the overall emissions associated with electrical energy use at the project site would be approximately 25 metric tons of CO₂E per year. An additional 23 MT CO₂E would be attributable to natural gas.

Water Use Emissions. Based on the amount of electricity generated to supply and convey this amount of water, as shown in Table 8, the project would generate approximately 2 metric ton of CO₂E per year. Emissions related to water consumption would be reduced by 20% per Senate Bill X7-7, by implementing measures that include the installation of low flow plumbing fixtures (i.e., faucets, toilets, shower heads) and water efficient irrigation systems.

Solid Waste Emissions. Implementation of a municipal recycling program that would achieve a 75% diversion rate statewide is required for residential uses per the California Integrated Waste Management Act of 1989 (AB 939). The CalEEMod results indicate that the project would result in approximately 1 metric ton of CO₂E per year associated with solid waste disposed within landfills provided 75% of solid waste is recycled (Table 9).

Transportation Emissions. Mobile source GHG emissions were estimated using the trip generation rates provided in CalEEMod 2022.1 (i.e., Institute of Transportation Engineers, Trip Generation Manual 11th Edition). Table 10 shows the estimated mobile emissions of GHGs for the project based on the estimated annual VMT of 501,776 as estimated by CalEEMod 2022.1 (see Appendix A) As shown in Table 10, the project would generate approximately 197 metric tons of CO₂E associated with new vehicle trips.

**Table 8
 Estimated Annual Energy-Related Greenhouse Gas Emissions**

Emission Source	Annual Emissions (CO₂E)
<i>Proposed Project</i>	
Electricity	25 metric tons
Natural Gas	23 metric tons
Total	48 metric tons

See Appendix for CalEEMod software program output.

**Table 9
 Estimated Annual
 Solid Waste and Water Use Greenhouse Gas Emissions**

Emission Source	Annual Emissions (CO₂E)
Water	2 metric tons
Solid Waste	1 metric tons
Total Water and Solid Waste	3 metric tons

See Appendix for CalEEMod software program output.

**Table 10
 Estimated Annual Mobile Emissions of Greenhouse Gases**

Emission Source	Annual Emissions (CO₂E)
<i>Proposed Project</i>	
Mobile Emissions (CO ₂ & CH ₄)	197 metric tons
Total	197 metric tons

See Appendix for CalEEMod software program output.

Combined Construction, Stationary and Mobile Source Emissions

Table 11 combines the net new construction, operational, and mobile GHG emissions associated with the proposed project. As discussed above, temporary emissions associated with construction activity (approximately 227 metric tons CO₂E) are amortized over 30 years (the anticipated life of the project).

For the proposed project, the combined annual emissions would total approximately 322 metric tons per year in CO₂E

**Table 11
 Combined Annual Greenhouse Gas Emissions**

Emission Source	Annual Emissions (CO₂E)
Construction	8 metric tons
Operational	
Energy	48 metric tons
Solid Waste	1 metric tons
Water	2 metric tons
Area Source	5 metric tons
Mobile	197 metric tons
Total	261 metric tons

See Appendix for CalEEMod software program output.

Conclusion

As stated herein, the project is new construction of 21 new multifamily units with 42 garage parking spaces, five guest spaces, eleven EV spaces and related improvements.

Would the project conflict with or obstruct implementation of the applicable air quality plan?

The project is consistent with the R-3 zoning designation and is anticipated in the local plans and SANDAG’s population and employment growth projections. Thus, the project would be within SANDAG’s population growth forecast and would not conflict with the SIP and RAQS.

Would the project result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard?

Project construction and operational emissions would not exceed the SDAPCD thresholds. Thus, the project would not result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard.

Would the project expose sensitive receptors to substantial pollutant concentrations?

The project would not cause or contribute to CO hot spots or otherwise expose receptors to substantial pollutant concentrations during construction or operations.

Would the project result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

The project would provide 21 residential units, associated parking and related infrastructure improvements. These uses would not result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

REFERENCES

- Association of Environmental Professionals. *California Environmental Quality Act (CEQA) Statute and Guidelines*. 2021
- California Air Pollution Control Officers Association. *CEQA and Climate Change: Addressing Climate Change through California Environmental Quality Act (CEQA)*. January 2008.
- California Air Pollution Control Officers Association. *California Emission Estimator Model version 2022.1.1.22*, May 2022.
- California Air Resources Board. *Ambient Air Quality Standards*. Updated February, 2016.
<http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/naaqs-caaqs-feb2016.pdf>
- California Air Resources Board, Maps of State and Federal Area Designations,
<https://ww2.arb.ca.gov/resources/documents/maps-state-and-federal-area-designations?corr>
- California Air Resources Board. 2020, 2021, & 2022 Annual Air Quality Data Summaries.
<http://www.arb.ca.gov/adam/topfour/topfour1.php>. Accessed May 2024.
- California Air Resources Board, *California Greenhouse Gas Emissions for 2000 to 2018*, 2020 Edition.
https://ww3.arb.ca.gov/cc/inventory/pubs/reports/2000_2018/ghg_inventory_trends_00-18.pdf
- California Air Resources Board. June 2017. *Greenhouse Gas Inventory Data Inventory Program*. Available: <https://www.arb.ca.gov/cc/inventory/inventory.htm>
- California Air Resources Board. April 2012. *Greenhouse Gas Inventory Data – 2020 Emissions Forecast*. Available: <http://www.arb.ca.gov/cc/inventory/data/forecast.htm>
- California Air Resources Board. May 2014. *2020 Business As Usual Emission Projection, 2014 Edition*. Available:
http://www.arb.ca.gov/cc/inventory/data/tables/2020_bau_forecast_by_scoping_category_2014-05-22.pdf
- California Air Resources Board. June 2015. *Greenhouse Gas Emissions Inventory– 2015 Edition*
Available: <http://www.arb.ca.gov/cc/inventory/data/data.htm>
- California Climate Action Registry General Reporting Protocol, *Reporting Entity-Wide Greenhouse Gas Emissions*, Version 3.1, January 2009.

California Environmental Protection Agency, March 2006. *Climate Action Team Report to Governor Schwarzenegger and the Legislature.*

http://www.climatechange.ca.gov/climate_action_team/reports/2006-04-03_FINAL_CAT_REPORT_EXECSUMMARY.PDF

City of Carlsbad. *Carlsbad Climate Action Plan*. September 2015, Updated April 2020.

City of Carlsbad. *Vehicle Miles Traveled (VMT) Analysis Guidelines*, May 2023.

Intergovernmental Panel on Climate Change [IPCC]. *Revised 1996 IPCC Guidelines for National Greenhouse Gas Inventories*. [Kroeze, C.; Mosier, A.; Nevison, C.; Oenema, O.; Seitzinger, S.; Cleemput, O. van; Conrad, R.; Mitra, A.P.; H.U., Neue; Sass, R.]. Paris: OECD, 1997.

Intergovernmental Panel on Climate Change [IPCC]. *Climate Change 2014 Synthesis Report*, 2014.

Office of the California Attorney General. *The California Environmental Quality Act, Addressing Global Warming Impacts at the Local Agency Level*. Updated May 21, 2008.

http://ag.ca.gov/globalwarming/pdf/GW_mitigation_measures.pdf

United States Environmental Protection Agency (U.S. EPA). *Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2010*. U. S. EPA #430-R-11-005. April 2012.

<http://www.epa.gov/climatechange/emissions/usinventoryreport.html>

United States Environmental Protection Agency (U.S. EPA). *Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2015*. U. S. EPA #430-P-17-001. April 2017.

<https://www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks-1990-2015>

United States Environmental Protection Agency (U.S. EPA). *Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990-2019*, U. S. EPA #430-R-21-001. February 2021

Appendix A

CalEEMod Air Quality and Greenhouse Gas Emissions Model Results -
Summer/Annual

270 Juniper Avenue Detailed Report

Table of Contents

1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
 - 2.3. Construction Emissions by Year, Mitigated
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
 - 2.6. Operations Emissions by Sector, Mitigated
3. Construction Emissions Details
 - 3.1. Demolition (2025) - Unmitigated
 - 3.2. Demolition (2025) - Mitigated

3.3. Site Preparation (2025) - Unmitigated

3.4. Site Preparation (2025) - Mitigated

3.5. Grading (2025) - Unmitigated

3.6. Grading (2025) - Mitigated

3.7. Building Construction (2025) - Unmitigated

3.8. Building Construction (2025) - Mitigated

3.9. Paving (2025) - Unmitigated

3.10. Paving (2025) - Mitigated

3.11. Architectural Coating (2025) - Unmitigated

3.12. Architectural Coating (2025) - Mitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.1.2. Mitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.2. Electricity Emissions By Land Use - Mitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.2.4. Natural Gas Emissions By Land Use - Mitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.3.2. Mitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.4.2. Mitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.5.2. Mitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.6.2. Mitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.7.2. Mitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.8.2. Mitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.9.2. Mitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.2.2. Mitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.3.2. Mitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.9.2. Mitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.10.4. Landscape Equipment - Mitigated

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.11.2. Mitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.12.2. Mitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.13.2. Mitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.14.2. Mitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.15.2. Mitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

5.18.2.2. Mitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	270 Juniper Avenue
Construction Start Date	1/7/2025
Operational Year	2025
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.20
Precipitation (days)	21.8
Location	33.15117315131744, -117.34494127200334
County	San Diego
City	Carlsbad
Air District	San Diego County APCD
Air Basin	San Diego
TAZ	6228
EDFZ	12
Electric Utility	San Diego Gas & Electric
Gas Utility	San Diego Gas & Electric
App Version	2022.1.1.24

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
------------------	------	------	-------------	-----------------------	------------------------	--------------------------------	------------	-------------

Condo/Townhouse	21.0	Dwelling Unit	1.31	22,260	2,000	—	59.0	—
Parking Lot	21.0	Space	0.19	8,400	200	—	—	—

1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Construction	C-2*	Limit Heavy-Duty Diesel Vehicle Idling
Water	W-7	Adopt a Water Conservation Strategy

* Qualitative or supporting measure. Emission reductions not included in the mitigated emissions results.

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.44	10.0	12.3	0.02	0.36	0.21	0.57	0.33	0.05	0.38	—	2,238	2,238	0.09	0.04	1.03	2,252
Mit.	4.44	10.0	12.3	0.02	0.36	0.21	0.57	0.33	0.05	0.38	—	2,238	2,238	0.09	0.04	1.03	2,252
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.43	14.1	15.6	0.02	0.64	2.85	3.49	0.59	1.36	1.95	—	2,681	2,681	0.11	0.04	0.03	2,695
Mit.	4.43	14.1	15.6	0.02	0.64	2.85	3.49	0.59	1.36	1.95	—	2,681	2,681	0.11	0.04	0.03	2,695
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.16	6.23	7.39	0.01	0.23	0.16	0.39	0.21	0.05	0.26	—	1,366	1,366	0.06	0.02	0.24	1,375
Mit.	1.16	6.23	7.39	0.01	0.23	0.16	0.39	0.21	0.05	0.26	—	1,366	1,366	0.06	0.02	0.24	1,375
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.21	1.14	1.35	< 0.005	0.04	0.03	0.07	0.04	0.01	0.05	—	226	226	0.01	< 0.005	0.04	228
Mit.	0.21	1.14	1.35	< 0.005	0.04	0.03	0.07	0.04	0.01	0.05	—	226	226	0.01	< 0.005	0.04	228
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	4.44	10.0	12.3	0.02	0.36	0.21	0.57	0.33	0.05	0.38	—	2,238	2,238	0.09	0.04	1.03	2,252
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	4.43	14.1	15.6	0.02	0.64	2.85	3.49	0.59	1.36	1.95	—	2,681	2,681	0.11	0.04	0.03	2,695
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	1.16	6.23	7.39	0.01	0.23	0.16	0.39	0.21	0.05	0.26	—	1,366	1,366	0.06	0.02	0.24	1,375
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.21	1.14	1.35	< 0.005	0.04	0.03	0.07	0.04	0.01	0.05	—	226	226	0.01	< 0.005	0.04	228

2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	4.44	10.0	12.3	0.02	0.36	0.21	0.57	0.33	0.05	0.38	—	2,238	2,238	0.09	0.04	1.03	2,252
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	4.43	14.1	15.6	0.02	0.64	2.85	3.49	0.59	1.36	1.95	—	2,681	2,681	0.11	0.04	0.03	2,695
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	1.16	6.23	7.39	0.01	0.23	0.16	0.39	0.21	0.05	0.26	—	1,366	1,366	0.06	0.02	0.24	1,375
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.21	1.14	1.35	< 0.005	0.04	0.03	0.07	0.04	0.01	0.05	—	226	226	0.01	< 0.005	0.04	228

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.42	0.66	7.04	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.84	1,601	1,611	1.07	0.05	4.90	1,659
Mit.	1.42	0.66	7.04	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.56	1,599	1,609	1.04	0.05	4.90	1,656
% Reduced	—	—	—	—	—	—	—	—	—	—	3%	< 0.5%	< 0.5%	3%	—	—	< 0.5%
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Unmit.	1.23	0.69	5.17	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.84	1,538	1,548	1.07	0.06	0.28	1,592
Mit.	1.23	0.69	5.17	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.56	1,537	1,546	1.04	0.06	0.28	1,590
% Reduced	—	—	—	—	—	—	—	—	—	—	3%	< 0.5%	< 0.5%	3%	—	—	< 0.5%
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.23	0.63	5.39	0.01	0.02	0.96	0.98	0.02	0.24	0.26	9.84	1,419	1,429	1.07	0.05	1.99	1,473
Mit.	1.23	0.63	5.39	0.01	0.02	0.96	0.98	0.02	0.24	0.26	9.56	1,417	1,427	1.04	0.05	1.99	1,470
% Reduced	—	—	—	—	—	—	—	—	—	—	3%	< 0.5%	< 0.5%	3%	—	—	< 0.5%
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.23	0.12	0.98	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	1.63	235	237	0.18	0.01	0.33	244
Mit.	0.23	0.12	0.98	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	1.58	235	236	0.17	0.01	0.33	243
% Reduced	—	—	—	—	—	—	—	—	—	—	3%	< 0.5%	< 0.5%	3%	1%	—	< 0.5%

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.73	0.53	5.44	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,298	1,298	0.06	0.05	4.74	1,319
Area	0.68	0.01	1.55	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	4.69	4.69	< 0.005	< 0.005	—	4.70
Energy	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	290	290	0.02	< 0.005	—	291
Water	—	—	—	—	—	—	—	—	—	—	1.41	8.44	9.86	0.15	< 0.005	—	14.5
Waste	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16

Total	1.42	0.66	7.04	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.84	1,601	1,611	1.07	0.05	4.90	1,659
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.71	0.58	5.12	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,240	1,240	0.06	0.05	0.12	1,257
Area	0.52	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Energy	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	290	290	0.02	< 0.005	—	291
Water	—	—	—	—	—	—	—	—	—	—	1.41	8.44	9.86	0.15	< 0.005	—	14.5
Waste	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	1.23	0.69	5.17	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.84	1,538	1,548	1.07	0.06	0.28	1,592
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.63	0.52	4.58	0.01	0.01	0.96	0.97	0.01	0.24	0.25	—	1,118	1,118	0.06	0.05	1.83	1,135
Area	0.60	0.01	0.77	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	2.31	2.31	< 0.005	< 0.005	—	2.32
Energy	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	290	290	0.02	< 0.005	—	291
Water	—	—	—	—	—	—	—	—	—	—	1.41	8.44	9.86	0.15	< 0.005	—	14.5
Waste	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	1.23	0.63	5.39	0.01	0.02	0.96	0.98	0.02	0.24	0.26	9.84	1,419	1,429	1.07	0.05	1.99	1,473
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.11	0.09	0.84	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	—	185	185	0.01	0.01	0.30	188
Area	0.11	< 0.005	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	0.38	0.38	< 0.005	< 0.005	—	0.38
Energy	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	48.0	48.0	< 0.005	< 0.005	—	48.2
Water	—	—	—	—	—	—	—	—	—	—	0.23	1.40	1.63	0.02	< 0.005	—	2.41
Waste	—	—	—	—	—	—	—	—	—	—	1.40	0.00	1.40	0.14	0.00	—	4.88
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03
Total	0.23	0.12	0.98	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	1.63	235	237	0.18	0.01	0.33	244

2.6. Operations Emissions by Sector, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.73	0.53	5.44	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,298	1,298	0.06	0.05	4.74	1,319
Area	0.68	0.01	1.55	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	4.69	4.69	< 0.005	< 0.005	—	4.70
Energy	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	290	290	0.02	< 0.005	—	291
Water	—	—	—	—	—	—	—	—	—	—	1.13	6.75	7.89	0.12	< 0.005	—	11.6
Waste	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	1.42	0.66	7.04	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.56	1,599	1,609	1.04	0.05	4.90	1,656
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.71	0.58	5.12	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,240	1,240	0.06	0.05	0.12	1,257
Area	0.52	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Energy	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	290	290	0.02	< 0.005	—	291
Water	—	—	—	—	—	—	—	—	—	—	1.13	6.75	7.89	0.12	< 0.005	—	11.6
Waste	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	1.23	0.69	5.17	0.01	0.02	1.08	1.10	0.02	0.28	0.29	9.56	1,537	1,546	1.04	0.06	0.28	1,590
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.63	0.52	4.58	0.01	0.01	0.96	0.97	0.01	0.24	0.25	—	1,118	1,118	0.06	0.05	1.83	1,135
Area	0.60	0.01	0.77	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	2.31	2.31	< 0.005	< 0.005	—	2.32
Energy	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	290	290	0.02	< 0.005	—	291
Water	—	—	—	—	—	—	—	—	—	—	1.13	6.75	7.89	0.12	< 0.005	—	11.6

Waste	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	1.23	0.63	5.39	0.01	0.02	0.96	0.98	0.02	0.24	0.26	9.56	1,417	1,427	1.04	0.05	1.99	1,470
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.11	0.09	0.84	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	—	185	185	0.01	0.01	0.30	188
Area	0.11	< 0.005	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	0.38	0.38	< 0.005	< 0.005	—	0.38
Energy	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	48.0	48.0	< 0.005	< 0.005	—	48.2
Water	—	—	—	—	—	—	—	—	—	—	0.19	1.12	1.31	0.02	< 0.005	—	1.93
Waste	—	—	—	—	—	—	—	—	—	—	1.40	0.00	1.40	0.14	0.00	—	4.88
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03
Total	0.23	0.12	0.98	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	1.58	235	236	0.17	0.01	0.33	243

3. Construction Emissions Details

3.1. Demolition (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.47	13.9	15.1	0.02	0.57	—	0.57	0.52	—	0.52	—	2,494	2,494	0.10	0.02	—	2,502
Demolition	—	—	—	—	—	0.09	0.09	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.76	0.83	< 0.005	0.03	—	0.03	0.03	—	0.03	—	137	137	0.01	< 0.005	—	137
Demolition	—	—	—	—	—	< 0.005	< 0.005	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.14	0.15	< 0.005	0.01	—	0.01	0.01	—	0.01	—	22.6	22.6	< 0.005	< 0.005	—	22.7
Demolition	—	—	—	—	—	< 0.005	< 0.005	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.51	0.00	0.00	0.11	0.11	0.00	0.02	0.02	—	112	112	0.01	< 0.005	0.01	113
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	0.10	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	75.5	75.5	< 0.005	0.01	< 0.005	79.1
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.19	6.19	< 0.005	< 0.005	0.01	6.28
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.13	4.13	< 0.005	< 0.005	< 0.005	4.34
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.03	1.03	< 0.005	< 0.005	< 0.005	1.04

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.68	0.68	< 0.005	< 0.005	< 0.005	0.72

3.2. Demolition (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.47	13.9	15.1	0.02	0.57	—	0.57	0.52	—	0.52	—	2,494	2,494	0.10	0.02	—	2,502
Demolition	—	—	—	—	—	0.09	0.09	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.76	0.83	< 0.005	0.03	—	0.03	0.03	—	0.03	—	137	137	0.01	< 0.005	—	137
Demolition	—	—	—	—	—	< 0.005	< 0.005	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.14	0.15	< 0.005	0.01	—	0.01	0.01	—	0.01	—	22.6	22.6	< 0.005	< 0.005	—	22.7
Demolition	—	—	—	—	—	< 0.005	< 0.005	—	< 0.005	< 0.005	—	—	—	—	—	—	—

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.51	0.00	0.00	0.11	0.11	0.00	0.02	0.02	—	112	112	0.01	< 0.005	0.01	113
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	0.10	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	75.5	75.5	< 0.005	0.01	< 0.005	79.1
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.19	6.19	< 0.005	< 0.005	0.01	6.28
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	4.13	4.13	< 0.005	< 0.005	< 0.005	4.34
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.03	1.03	< 0.005	< 0.005	< 0.005	1.04
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	0.68	0.68	< 0.005	< 0.005	< 0.005	0.72

3.3. Site Preparation (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.31	12.1	12.1	0.02	0.56	—	0.56	0.52	—	0.52	—	2,065	2,065	0.08	0.02	—	2,072
Dust From Material Movement	—	—	—	—	—	2.44	2.44	—	1.17	1.17	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.07	0.07	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	11.3	11.3	< 0.005	< 0.005	—	11.4
Dust From Material Movement	—	—	—	—	—	0.01	0.01	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.87	1.87	< 0.005	< 0.005	—	1.88
Dust From Material Movement	—	—	—	—	—	< 0.005	< 0.005	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.30	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	67.2	67.2	< 0.005	< 0.005	0.01	68.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.37	0.37	< 0.005	< 0.005	< 0.005	0.38
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.06	0.06	< 0.005	< 0.005	< 0.005	0.06
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.4. Site Preparation (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.31	12.1	12.1	0.02	0.56	—	0.56	0.52	—	0.52	—	2,065	2,065	0.08	0.02	—	2,072

Dust From Material Movement	—	—	—	—	—	2.44	2.44	—	1.17	1.17	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.07	0.07	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	11.3	11.3	< 0.005	< 0.005	—	11.4
Dust From Material Movement	—	—	—	—	—	0.01	0.01	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.01	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.87	1.87	< 0.005	< 0.005	—	1.88
Dust From Material Movement	—	—	—	—	—	< 0.005	< 0.005	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.30	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	67.2	67.2	< 0.005	< 0.005	0.01	68.1
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.37	0.37	< 0.005	< 0.005	< 0.005	0.38
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.06	0.06	< 0.005	< 0.005	< 0.005	0.06
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Grading (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.51	14.1	14.5	0.02	0.64	—	0.64	0.59	—	0.59	—	2,455	2,455	0.10	0.02	—	2,463
Dust From Material Movement	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.15	0.16	< 0.005	0.01	—	0.01	0.01	—	0.01	—	26.9	26.9	< 0.005	< 0.005	—	27.0

Dust From Material Movement	—	—	—	—	—	0.03	0.03	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.03	0.03	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.45	4.45	< 0.005	< 0.005	—	4.47
Dust From Material Movement	—	—	—	—	—	0.01	0.01	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.41	0.00	0.00	0.08	0.08	0.00	0.02	0.02	—	89.6	89.6	< 0.005	< 0.005	0.01	90.8
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.99	0.99	< 0.005	< 0.005	< 0.005	1.01
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.16	0.16	< 0.005	< 0.005	< 0.005	0.17
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00
---------	------	------	------	------	------	------	------	------	------	------	------	---	------	------	------	------	------

3.6. Grading (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.51	14.1	14.5	0.02	0.64	—	0.64	0.59	—	0.59	—	2,455	2,455	0.10	0.02	—	2,463
Dust From Material Movement	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.15	0.16	< 0.005	0.01	—	0.01	0.01	—	0.01	—	26.9	26.9	< 0.005	< 0.005	—	27.0
Dust From Material Movement	—	—	—	—	—	0.03	0.03	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.03	0.03	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.45	4.45	< 0.005	< 0.005	—	4.47

Dust From Material Movement	—	—	—	—	—	0.01	0.01	—	< 0.005	< 0.005	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.41	0.00	0.00	0.08	0.08	0.00	0.02	0.02	—	89.6	89.6	< 0.005	< 0.005	0.01	90.8
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.99	0.99	< 0.005	< 0.005	< 0.005	1.01
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.16	0.16	< 0.005	< 0.005	< 0.005	0.17
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.07	8.95	10.0	0.02	0.33	—	0.33	0.30	—	0.30	—	1,801	1,801	0.07	0.01	—	1,807
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.07	8.95	10.0	0.02	0.33	—	0.33	0.30	—	0.30	—	1,801	1,801	0.07	0.01	—	1,807
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.58	4.90	5.50	0.01	0.18	—	0.18	0.17	—	0.17	—	987	987	0.04	0.01	—	990
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.11	0.89	1.00	< 0.005	0.03	—	0.03	0.03	—	0.03	—	163	163	0.01	< 0.005	—	164
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.06	0.86	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	177	177	0.01	0.01	0.66	180
Vendor	< 0.005	0.12	0.06	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	90.6	90.6	< 0.005	0.01	0.24	94.8
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.76	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	167	167	0.01	0.01	0.02	169
Vendor	< 0.005	0.13	0.06	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	90.7	90.7	< 0.005	0.01	0.01	94.6
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.42	0.00	0.00	0.09	0.09	0.00	0.02	0.02	—	92.4	92.4	< 0.005	< 0.005	0.16	93.7
Vendor	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	49.7	49.7	< 0.005	0.01	0.06	51.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.08	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	15.3	15.3	< 0.005	< 0.005	0.03	15.5
Vendor	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	8.22	8.22	< 0.005	< 0.005	0.01	8.59
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.8. Building Construction (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.07	8.95	10.0	0.02	0.33	—	0.33	0.30	—	0.30	—	1,801	1,801	0.07	0.01	—	1,807
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	1.07	8.95	10.0	0.02	0.33	—	0.33	0.30	—	0.30	—	1,801	1,801	0.07	0.01	—	1,807
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.58	4.90	5.50	0.01	0.18	—	0.18	0.17	—	0.17	—	987	987	0.04	0.01	—	990
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.11	0.89	1.00	< 0.005	0.03	—	0.03	0.03	—	0.03	—	163	163	0.01	< 0.005	—	164
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.06	0.86	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	177	177	0.01	0.01	0.66	180
Vendor	< 0.005	0.12	0.06	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	90.6	90.6	< 0.005	0.01	0.24	94.8
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.76	0.00	0.00	0.16	0.16	0.00	0.04	0.04	—	167	167	0.01	0.01	0.02	169
Vendor	< 0.005	0.13	0.06	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	90.7	90.7	< 0.005	0.01	0.01	94.6
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.03	0.42	0.00	0.00	0.09	0.09	0.00	0.02	0.02	—	92.4	92.4	< 0.005	< 0.005	0.16	93.7
Vendor	< 0.005	0.07	0.03	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	49.7	49.7	< 0.005	0.01	0.06	51.9

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.08	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	15.3	15.3	< 0.005	< 0.005	0.03	15.5
Vendor	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	8.22	8.22	< 0.005	< 0.005	0.01	8.59
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.49	4.63	6.50	0.01	0.20	—	0.20	0.19	—	0.19	—	992	992	0.04	0.01	—	995
Paving	0.05	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.13	0.18	< 0.005	0.01	—	0.01	0.01	—	0.01	—	27.2	27.2	< 0.005	< 0.005	—	27.3
Paving	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.02	0.03	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.50	4.50	< 0.005	< 0.005	—	4.51

Paving	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.51	0.00	0.00	0.11	0.11	0.00	0.02	0.02	—	112	112	0.01	< 0.005	0.01	113
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.10	3.10	< 0.005	< 0.005	0.01	3.14
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.51	0.51	< 0.005	< 0.005	< 0.005	0.52
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.10. Paving (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.49	4.63	6.50	0.01	0.20	—	0.20	0.19	—	0.19	—	992	992	0.04	0.01	—	995
Paving	0.05	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.13	0.18	< 0.005	0.01	—	0.01	0.01	—	0.01	—	27.2	27.2	< 0.005	< 0.005	—	27.3
Paving	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.02	0.03	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.50	4.50	< 0.005	< 0.005	—	4.51
Paving	< 0.005	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.51	0.00	0.00	0.11	0.11	0.00	0.02	0.02	—	112	112	0.01	< 0.005	0.01	113
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.10	3.10	< 0.005	< 0.005	0.01	3.14
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.51	0.51	< 0.005	< 0.005	< 0.005	0.52
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.13	0.88	1.14	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	3.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.13	0.88	1.14	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	3.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.11	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	16.5	16.5	< 0.005	< 0.005	—	16.5
Architectural Coatings	0.39	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.02	0.03	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.73	2.73	< 0.005	< 0.005	—	2.73
Architectural Coatings	0.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.17	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	35.4	35.4	< 0.005	< 0.005	0.13	35.9
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.15	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	33.4	33.4	< 0.005	< 0.005	< 0.005	33.9
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	4.16	4.16	< 0.005	< 0.005	0.01	4.22

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.69	0.69	< 0.005	< 0.005	< 0.005	0.70
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.12. Architectural Coating (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.13	0.88	1.14	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	3.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.13	0.88	1.14	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	3.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.11	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	16.5	16.5	< 0.005	< 0.005	—	16.5
Architectural Coatings	0.39	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	0.02	0.03	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	2.73	2.73	< 0.005	< 0.005	—	2.73
Architectural Coatings	0.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.01	0.17	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	35.4	35.4	< 0.005	< 0.005	0.13	35.9
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.15	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	33.4	33.4	< 0.005	< 0.005	< 0.005	33.9
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	4.16	4.16	< 0.005	< 0.005	0.01	4.22

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	0.69	0.69	< 0.005	< 0.005	< 0.005	0.70
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	0.73	0.53	5.44	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,298	1,298	0.06	0.05	4.74	1,319
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.73	0.53	5.44	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,298	1,298	0.06	0.05	4.74	1,319
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	0.71	0.58	5.12	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,240	1,240	0.06	0.05	0.12	1,257
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.71	0.58	5.12	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,240	1,240	0.06	0.05	0.12	1,257

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	0.11	0.09	0.84	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	—	185	185	0.01	0.01	0.30	188
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.11	0.09	0.84	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	—	185	185	0.01	0.01	0.30	188

4.1.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	0.73	0.53	5.44	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,298	1,298	0.06	0.05	4.74	1,319
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.73	0.53	5.44	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,298	1,298	0.06	0.05	4.74	1,319
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	0.71	0.58	5.12	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,240	1,240	0.06	0.05	0.12	1,257
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.71	0.58	5.12	0.01	0.01	1.08	1.09	0.01	0.28	0.28	—	1,240	1,240	0.06	0.05	0.12	1,257
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	0.11	0.09	0.84	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	—	185	185	0.01	0.01	0.30	188
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.11	0.09	0.84	< 0.005	< 0.005	0.17	0.18	< 0.005	0.04	0.05	—	185	185	0.01	0.01	0.30	188

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	140	140	0.01	< 0.005	—	140
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	11.6	11.6	< 0.005	< 0.005	—	11.7
Total	—	—	—	—	—	—	—	—	—	—	—	152	152	0.01	< 0.005	—	152
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	140	140	0.01	< 0.005	—	140
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	11.6	11.6	< 0.005	< 0.005	—	11.7
Total	—	—	—	—	—	—	—	—	—	—	—	152	152	0.01	< 0.005	—	152
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	23.2	23.2	< 0.005	< 0.005	—	23.2
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	1.93	1.93	< 0.005	< 0.005	—	1.93
Total	—	—	—	—	—	—	—	—	—	—	—	25.1	25.1	< 0.005	< 0.005	—	25.2

4.2.2. Electricity Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
----------	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	140	140	0.01	< 0.005	—	140
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	11.6	11.6	< 0.005	< 0.005	—	11.7
Total	—	—	—	—	—	—	—	—	—	—	—	152	152	0.01	< 0.005	—	152
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	140	140	0.01	< 0.005	—	140
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	11.6	11.6	< 0.005	< 0.005	—	11.7
Total	—	—	—	—	—	—	—	—	—	—	—	152	152	0.01	< 0.005	—	152
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	23.2	23.2	< 0.005	< 0.005	—	23.2
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	1.93	1.93	< 0.005	< 0.005	—	1.93
Total	—	—	—	—	—	—	—	—	—	—	—	25.1	25.1	< 0.005	< 0.005	—	25.2

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139

Parking Lot	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139
Parking Lot	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	22.9	22.9	< 0.005	< 0.005	—	23.0
Parking Lot	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	22.9	22.9	< 0.005	< 0.005	—	23.0

4.2.4. Natural Gas Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139
Parking Lot	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Condo/To	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139
Parking Lot	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.01	0.11	0.05	< 0.005	0.01	—	0.01	0.01	—	0.01	—	138	138	0.01	< 0.005	—	139
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	22.9	22.9	< 0.005	< 0.005	—	23.0
Parking Lot	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	22.9	22.9	< 0.005	< 0.005	—	23.0

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consumer Products	0.48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	0.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscaping Equipment	0.17	0.01	1.55	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.69	4.69	< 0.005	< 0.005	—	4.70
Total	0.68	0.01	1.55	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	4.69	4.69	< 0.005	< 0.005	—	4.70

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consumer Products	0.48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	0.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.52	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consumer Products	0.09	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscaping Equipment	0.02	< 0.005	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.38	0.38	< 0.005	< 0.005	—	0.38
Total	0.11	< 0.005	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	0.38	0.38	< 0.005	< 0.005	—	0.38

4.3.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00

Consumer	0.48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	0.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.17	0.01	1.55	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.69	4.69	< 0.005	< 0.005	—	4.70
Total	0.68	0.01	1.55	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	4.69	4.69	< 0.005	< 0.005	—	4.70
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consumer Products	0.48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	0.04	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.52	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consumer Products	0.09	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.02	< 0.005	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	0.38	0.38	< 0.005	< 0.005	—	0.38
Total	0.11	< 0.005	0.14	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	0.38	0.38	< 0.005	< 0.005	—	0.38

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	1.41	8.42	9.83	0.15	< 0.005	—	14.5
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.03	0.03	< 0.005	< 0.005	—	0.03
Total	—	—	—	—	—	—	—	—	—	—	1.41	8.44	9.86	0.15	< 0.005	—	14.5
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	1.41	8.42	9.83	0.15	< 0.005	—	14.5
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.03	0.03	< 0.005	< 0.005	—	0.03
Total	—	—	—	—	—	—	—	—	—	—	1.41	8.44	9.86	0.15	< 0.005	—	14.5
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	0.23	1.39	1.63	0.02	< 0.005	—	2.40
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005
Total	—	—	—	—	—	—	—	—	—	—	0.23	1.40	1.63	0.02	< 0.005	—	2.41

4.4.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
----------	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	1.13	6.73	7.86	0.12	< 0.005	—	11.6
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.02	0.02	< 0.005	< 0.005	—	0.02
Total	—	—	—	—	—	—	—	—	—	—	1.13	6.75	7.89	0.12	< 0.005	—	11.6
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	1.13	6.73	7.86	0.12	< 0.005	—	11.6
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.02	0.02	< 0.005	< 0.005	—	0.02
Total	—	—	—	—	—	—	—	—	—	—	1.13	6.75	7.89	0.12	< 0.005	—	11.6
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	0.19	1.11	1.30	0.02	< 0.005	—	1.92
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	< 0.005	< 0.005	< 0.005	< 0.005	—	< 0.005
Total	—	—	—	—	—	—	—	—	—	—	0.19	1.12	1.31	0.02	< 0.005	—	1.93

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	1.40	0.00	1.40	0.14	0.00	—	4.88
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	1.40	0.00	1.40	0.14	0.00	—	4.88

4.5.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	8.43	0.00	8.43	0.84	0.00	—	29.5
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	1.40	0.00	1.40	0.14	0.00	—	4.88
Parking Lot	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	1.40	0.00	1.40	0.14	0.00	—	4.88

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/Townhouse	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03

4.6.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.16	0.16
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Condo/To wnhouse	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.03	0.03

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.7.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Demolition	Demolition	1/7/2025	2/4/2025	5.00	20.0	—
Site Preparation	Site Preparation	2/5/2025	2/7/2025	5.00	2.00	—
Grading	Grading	2/8/2025	2/13/2025	5.00	4.00	—
Building Construction	Building Construction	2/14/2025	11/21/2025	5.00	200	—
Paving	Paving	11/22/2025	12/6/2025	5.00	10.0	—
Architectural Coating	Architectural Coating	9/21/2025	11/21/2025	5.00	45.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Average	1.00	8.00	33.0	0.73
Demolition	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Demolition	Tractors/Loaders/Backhoes	Diesel	Average	3.00	8.00	84.0	0.37
Site Preparation	Graders	Diesel	Average	1.00	8.00	148	0.41
Site Preparation	Rubber Tired Dozers	Diesel	Average	1.00	7.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Average	2.00	7.00	84.0	0.37
Building Construction	Cranes	Diesel	Average	1.00	6.00	367	0.29
Building Construction	Forklifts	Diesel	Average	1.00	6.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	1.00	8.00	14.0	0.74
Building Construction	Tractors/Loaders/Backhoes	Diesel	Average	1.00	6.00	84.0	0.37
Building Construction	Welders	Diesel	Average	3.00	8.00	46.0	0.45
Paving	Cement and Mortar Mixers	Diesel	Average	1.00	6.00	10.0	0.56
Paving	Pavers	Diesel	Average	1.00	6.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	1.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	1.00	7.00	36.0	0.38
Paving	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Architectural Coating	Air Compressors	Diesel	Average	1.00	6.00	37.0	0.48

5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Average	1.00	8.00	33.0	0.73
Demolition	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Demolition	Tractors/Loaders/Backhoes	Diesel	Average	3.00	8.00	84.0	0.37
Site Preparation	Graders	Diesel	Average	1.00	8.00	148	0.41
Site Preparation	Rubber Tired Dozers	Diesel	Average	1.00	7.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Average	2.00	7.00	84.0	0.37
Building Construction	Cranes	Diesel	Average	1.00	6.00	367	0.29
Building Construction	Forklifts	Diesel	Average	1.00	6.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	1.00	8.00	14.0	0.74
Building Construction	Tractors/Loaders/Backhoes	Diesel	Average	1.00	6.00	84.0	0.37
Building Construction	Welders	Diesel	Average	3.00	8.00	46.0	0.45
Paving	Cement and Mortar Mixers	Diesel	Average	1.00	6.00	10.0	0.56
Paving	Pavers	Diesel	Average	1.00	6.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	1.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Average	1.00	7.00	36.0	0.38
Paving	Tractors/Loaders/Backhoes	Diesel	Average	1.00	8.00	84.0	0.37
Architectural Coating	Air Compressors	Diesel	Average	1.00	6.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	12.5	12.0	LDA,LDT1,LDT2
Demolition	Vendor	—	7.63	HHDT,MHDT
Demolition	Hauling	1.05	20.0	HHDT
Demolition	Onsite truck	—	—	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	7.50	12.0	LDA,LDT1,LDT2
Site Preparation	Vendor	—	7.63	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	10.0	12.0	LDA,LDT1,LDT2
Grading	Vendor	—	7.63	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	18.6	12.0	LDA,LDT1,LDT2
Building Construction	Vendor	3.62	7.63	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	12.5	12.0	LDA,LDT1,LDT2
Paving	Vendor	—	7.63	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT

Architectural Coating	—	—	—	—
Architectural Coating	Worker	3.73	12.0	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	7.63	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	12.5	12.0	LDA,LDT1,LDT2
Demolition	Vendor	—	7.63	HHDT,MHDT
Demolition	Hauling	1.05	20.0	HHDT
Demolition	Onsite truck	—	—	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	7.50	12.0	LDA,LDT1,LDT2
Site Preparation	Vendor	—	7.63	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	10.0	12.0	LDA,LDT1,LDT2
Grading	Vendor	—	7.63	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	18.6	12.0	LDA,LDT1,LDT2
Building Construction	Vendor	3.62	7.63	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT

Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	12.5	12.0	LDA,LDT1,LDT2
Paving	Vendor	—	7.63	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	3.73	12.0	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	7.63	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	45,077	15,026	0.00	0.00	494

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (Building Square Footage)	Acres Paved (acres)
Demolition	0.00	0.00	0.00	1,800	—
Site Preparation	—	—	1.88	0.00	—

Grading	—	—	4.00	0.00	—
Paving	0.00	0.00	0.00	0.00	0.19

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	2	61%	61%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Condo/Townhouse	—	0%
Parking Lot	0.19	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2025	0.00	589	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VM/Weekday	VM/Saturday	VM/Sunday	VM/Year
Condo/Townhouse	154	171	132	55,867	1,381	1,535	1,184	501,776
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VM/Weekday	VM/Saturday	VM/Sunday	VM/Year
---------------	---------------	----------------	--------------	------------	------------	-------------	-----------	---------

Condo/Townhouse	154	171	132	55,867	1,381	1,535	1,184	501,776
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

Hearth Type	Unmitigated (number)
Condo/Townhouse	—
Wood Fireplaces	0
Gas Fireplaces	0
Propane Fireplaces	0
Electric Fireplaces	0
No Fireplaces	0
Conventional Wood Stoves	0
Catalytic Wood Stoves	0
Non-Catalytic Wood Stoves	0
Pellet Wood Stoves	0

5.10.1.2. Mitigated

Hearth Type	Unmitigated (number)
Condo/Townhouse	—
Wood Fireplaces	0
Gas Fireplaces	0
Propane Fireplaces	0
Electric Fireplaces	0

No Fireplaces	0
Conventional Wood Stoves	0
Catalytic Wood Stoves	0
Non-Catalytic Wood Stoves	0
Pellet Wood Stoves	0

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
45076.5	15,026	0.00	0.00	494

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBtu/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBtu/yr)
Condo/Townhouse	86,716	589	0.0330	0.0040	431,859

Parking Lot	7,212	589	0.0330	0.0040	0.00
-------------	-------	-----	--------	--------	------

5.11.2. Mitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Condo/Townhouse	86,716	589	0.0330	0.0040	431,859
Parking Lot	7,212	589	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Condo/Townhouse	737,795	36,530
Parking Lot	0.00	2,989

5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Condo/Townhouse	590,236	29,224
Parking Lot	0.00	2,391

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Condo/Townhouse	15.6	—
Parking Lot	0.00	—

5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Condo/Townhouse	15.6	—
Parking Lot	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Condo/Townhouse	Average room A/C & Other residential A/C and heat pumps	R-410A	2,088	< 0.005	2.50	2.50	10.0
Condo/Townhouse	Household refrigerators and/or freezers	R-134a	1,430	0.12	0.60	0.00	1.00

5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Condo/Townhouse	Average room A/C & Other residential A/C and heat pumps	R-410A	2,088	< 0.005	2.50	2.50	10.0
Condo/Townhouse	Household refrigerators and/or freezers	R-134a	1,430	0.12	0.60	0.00	1.00

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
----------------	-----------	-------------	----------------	---------------	------------	-------------

5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
----------------	-----------	-------------	----------------	---------------	------------	-------------

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
----------------	-----------	----------------	---------------	----------------	------------	-------------

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
----------------	-----------	--------	--------------------------	------------------------------	------------------------------

5.17. User Defined

Equipment Type	Fuel Type
----------------	-----------

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
--------------------------	----------------------	---------------	-------------

5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
--------------------------	----------------------	---------------	-------------

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres
--------------------	---------------	-------------

5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres
--------------------	---------------	-------------

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
-----------	--------	------------------------------	------------------------------

5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
-----------	--------	------------------------------	------------------------------

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	8.12	annual days of extreme heat
Extreme Precipitation	2.70	annual days with precipitation above 20 mm
Sea Level Rise	—	meters of inundation depth
Wildfire	0.00	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events.

Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.0 meter, 1.41 meters

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A

Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	29.9
AQ-PM	44.7
AQ-DPM	75.3
Drinking Water	10.4
Lead Risk Housing	7.94
Pesticides	11.8
Toxic Releases	14.1
Traffic	33.7
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	39.4

Haz Waste Facilities/Generators	77.5
Impaired Water Bodies	51.2
Solid Waste	0.00
Sensitive Population	—
Asthma	11.7
Cardio-vascular	34.8
Low Birth Weights	17.7
Socioeconomic Factor Indicators	—
Education	7.40
Housing	67.3
Linguistic	6.27
Poverty	18.2
Unemployment	51.3

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	87.93789298
Employed	86.50070576
Median HI	66.05928397
Education	—
Bachelor's or higher	79.93070704
High school enrollment	100
Preschool enrollment	1.873476197
Transportation	—
Auto Access	26.17733864

Active commuting	72.16732965
Social	—
2-parent households	15.61657898
Voting	65.68715514
Neighborhood	—
Alcohol availability	25.7153856
Park access	81.35506224
Retail density	66.53406904
Supermarket access	48.31258822
Tree canopy	15.91171564
Housing	—
Homeownership	9.457205184
Housing habitability	61.76055434
Low-inc homeowner severe housing cost burden	96.31720775
Low-inc renter severe housing cost burden	70.85846272
Uncrowded housing	90.74810728
Health Outcomes	—
Insured adults	48.22276402
Arthritis	61.9
Asthma ER Admissions	72.8
High Blood Pressure	81.9
Cancer (excluding skin)	22.7
Asthma	83.3
Coronary Heart Disease	63.8
Chronic Obstructive Pulmonary Disease	76.7
Diagnosed Diabetes	92.6
Life Expectancy at Birth	81.7

Cognitively Disabled	80.8
Physically Disabled	55.6
Heart Attack ER Admissions	84.0
Mental Health Not Good	79.6
Chronic Kidney Disease	73.0
Obesity	83.6
Pedestrian Injuries	93.1
Physical Health Not Good	90.6
Stroke	75.8
Health Risk Behaviors	—
Binge Drinking	1.4
Current Smoker	73.3
No Leisure Time for Physical Activity	89.3
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	48.1
Children	81.0
Elderly	14.2
English Speaking	90.3
Foreign-born	11.2
Outdoor Workers	90.5
Climate Change Adaptive Capacity	—
Impervious Surface Cover	20.2
Traffic Density	27.1
Traffic Access	23.0
Other Indices	—
Hardship	7.7

Other Decision Support	—
2016 Voting	89.4

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	13.0
Healthy Places Index Score for Project Location (b)	62.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Construction: Construction Phases	Architectural coating phase overlapped with building construction to reflect anticipated construction schedule.
Operations: Hearths	No fireplaces/hearths or wood stoves would be included in the units.